

GUV4-202-PV

GUV Push-in terminal block

Download date : 2024-05-18



For reference only!version1.0

CUL Technical Data (UL1059)

Use Group	B	C	D
Rated Voltage [V]	300	300	600
Rated Current [A]	28	28	5
Wire Range	24-10		

IEC Technical Data (IEC 60947-7-1)

Overvoltage Category	III
Contamination Class	3
Rated Voltage [V]	500V
Rated Current [A]	28A
Impulse withstand voltage	6KV

Conductor cross section

Soild	0.2-4.0mm ²
Flexible	0.2-4.0mm ²
Flexible with ferrule	0.2-4.0mm ²

Material

GUV4-202-PV

GUV Push-in terminal block

Download date : 2024-05-18




Insulation Material	PA66
Flame retardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated


Other Data

Length/Height/Thickness [mm]	83.8/45.9/6.2
Stripping Length [mm]	10-12

Dimensions

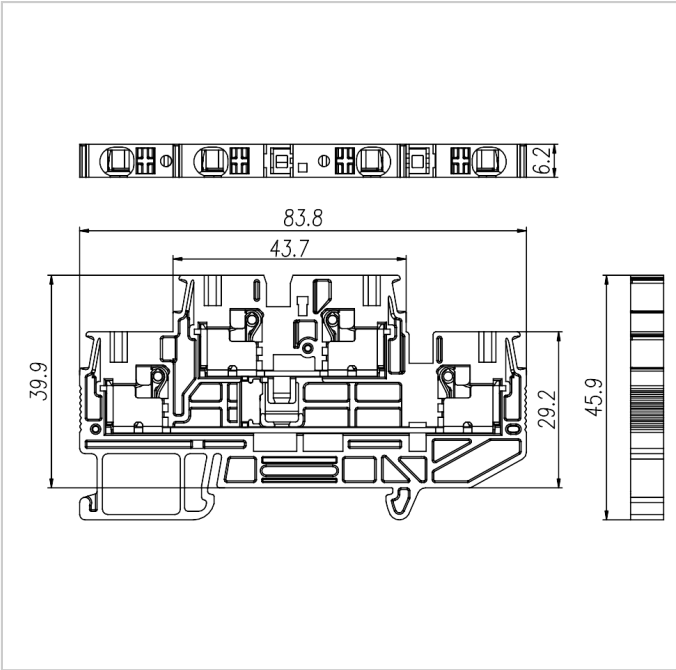


Accessories




[FUVA4-XX](#)




[DUV4-202](#)



[PUV4-80](#)



[EB-35](#)



[EW-35](#)



-
[DGS1-35x7.5W4.2x12](#)



-
[DGS1-35x7.5W5.2x15](#)



-
[DGS1-35x7.5W](#)



-
[DGL2-35x7.5A](#)



-
[DGL2-35x7.5B](#)



-
[DGL2-35x7.5C](#)



-
[DGL2-35x7.5D](#)