




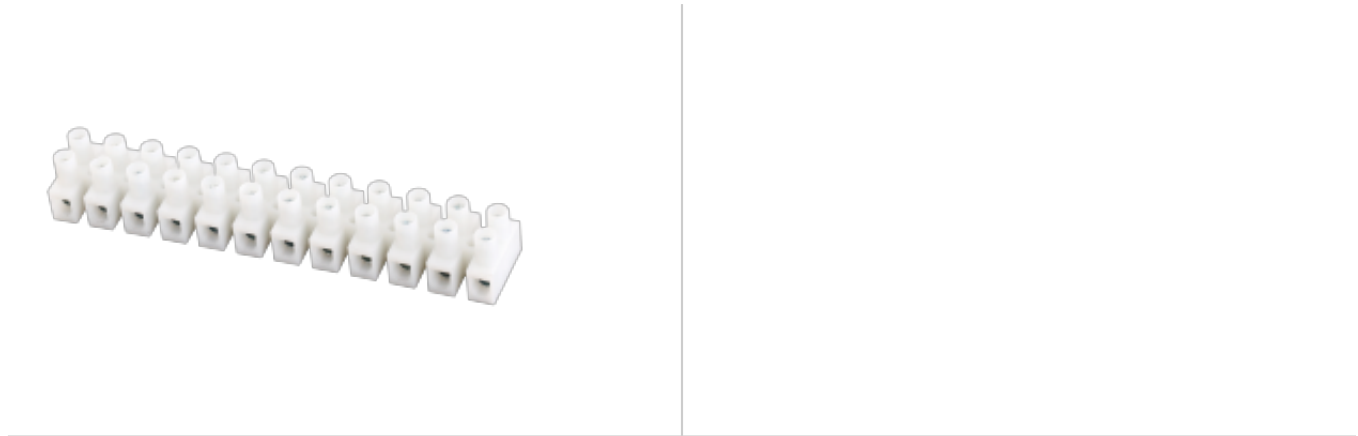

For reference only!version1.0

Material

|                      |                          |
|----------------------|--------------------------|
| Housing              | PA66 , UL94V-2           |
| Screws               | M3.5 , Steel , Zn plated |
| Pressure line column | Copper alloy , Ni plated |

Electrical

|                       |                    |                  |
|-----------------------|--------------------|------------------|
| Standard              | UL                 | IEC              |
| Rated Voltage         | 600V               | 750V             |
| Rated current         | 50A                | 41A              |
| Wire range            | 20-8AWG            | 6mm <sup>2</sup> |
| Contact Resistance    | 20mΩ               |                  |
| Insulation resistance | 500MΩ/DC500V       |                  |
| Withstanding voltage  | AC2200V/1Min       |                  |
| Temp.range            | -40℃~+105℃         |                  |
| Torque                | 0.8Nm ( 7.2Lb.in ) |                  |

Dimensions



## MY12HW-1.2

### FEED THROUGH TERMINAL BLOCK

Download date : 2024-05-03

