


WJ15EDGKNM-3.5/3.81
PLUG-IN TERMINAL BLOCK

Download date : 2025-05-11



PCB connector
Rated current: 8 A
Rated voltage: 300 V
Wire range: 24-16 AWG
Pitch: 3.5 mm/3.81 mm
Connection method: Push-in spring connection

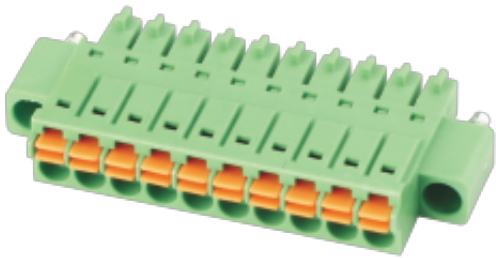

For reference only!version1.0

UL/CUL

Use Group	B	C	D
Rate Voltage [V]	300	-	300
Rated Current [A]	8	-	8
Wire Range [AWG]	24~16		
Dielectric Voltage-Withstand	1.6KV		

IEC

Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	160	160	320
Rated Current [A]	8	8	8
Impulse withstand voltage [KV]	2.5	2.5	2.5
Conductor cross section[solid/flexible] [mm²]	0.2~1.5		

Material

WJ15EDGKNM-3.5/3.81
PLUG-IN TERMINAL BLOCK

Download date : 2025-05-11




Insulation Material	PA66
Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated



Other Data

Pitch/Poles [mm]/[P]	3.5 , 3.81/2~24
Stripping Length [mm]	9~10
Screw/Torque(Max)[N.m]	/
Operating temperature [°C]	-40~+105
Soldering temperature	/
Pin dimensions [mm]	/
PCB Hole Diameter [mm]	/

Dimensions

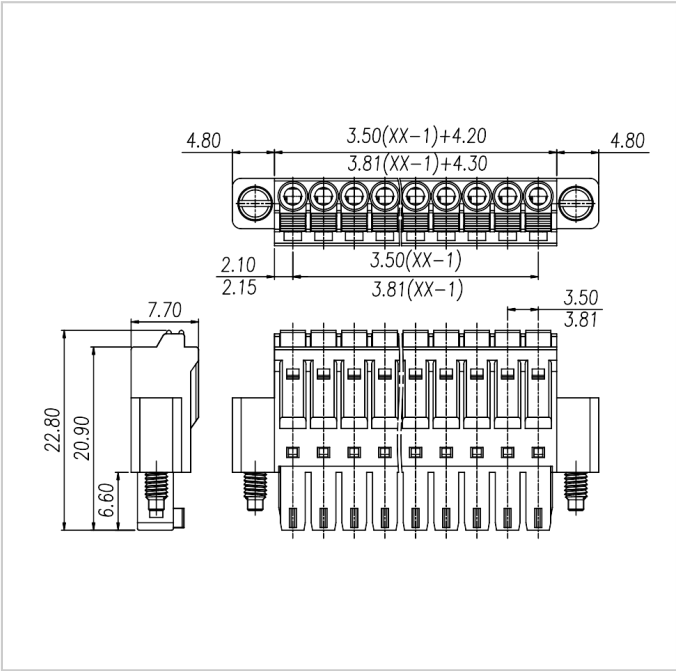


Accessories



[WJ15EDGVHBM-THT-3.5/3.81](#)

[WJ15EDGRHBM-THT-3.5/3.81](#)


[WJ15EDGVM-THR-3.5/3.81](#)



[WJ15EDGRM-THR-3.5/3.81](#)

[WJ15EDGKRN-3.81](#)

[WJ15EDGLM-3.5/3.81](#)



[WJ15EDGVM-3.5/3.81](#)

[WJ15EDGRM-3.5/3.81](#)

[WJ15EDGVH3M-3.5](#)

[WJ15EDGRH3M-3.5](#)

[WJ15EDGVH3M-THT-3.5](#)

[WJ15EDGRH3M-THT-3.5](#)