

|                                                                                   |                                                                                                                                          |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
|  | <p>PCB connector</p> <p>Rated current: 15 A</p> <p>Rated voltage: 300 V</p> <p>Pitch: 5.0 mm/5.08 mm</p> <p>Mounting: Wave soldering</p> |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|

|                                                                                   |                               |
|-----------------------------------------------------------------------------------|-------------------------------|
|  | For reference only!version1.0 |
|-----------------------------------------------------------------------------------|-------------------------------|

UL/CUL

| Use Group                    | B     | C | D   |
|------------------------------|-------|---|-----|
| Rate Voltage [V]             | 300   | - | 300 |
| Rated Current [A]            | 15    | - | 10  |
| Wire Range [AWG]             | /     |   |     |
| Dielectric Voltage-Withstand | 1.6KV |   |     |

IEC

| Overvoltage Category                          | III | III | II  |
|-----------------------------------------------|-----|-----|-----|
| Contamination Class                           | 3   | 2   | 2   |
| Rated Voltage [V]                             | 250 | 320 | 630 |
| Rated Current [A]                             | 15  | 15  | 15  |
| Impulse withstand voltage [KV]                | 4   | 4   | 4   |
| Conductor cross section[solid/flexible] [mm²] | /   |     |     |

Material

|                     |      |
|---------------------|------|
| Insulation Material | PA66 |
|---------------------|------|


|                              |              |
|------------------------------|--------------|
| Flame relardant rating       | UL94V-0      |
| Conductor Material           | Copper alloy |
| Plating of conductor surface | Sn plated    |

Other Data

|                            |                 |
|----------------------------|-----------------|
| Pitch/Poles [mm]/[P]       | 5.0 , 5.08/2-24 |
| Stripping Length [mm]      | /               |
| Screw/Torque(Max)[N.m]     | /               |
| Operating temperature [°C] | -40~+105        |
| Soldering temperature      | 260°C/5S        |
| Pin dimensions [mm]        | 1.0*1.0         |
| PCB Hole Diameter [mm]     | □1.7            |

Dimensions

PCB opening diagram

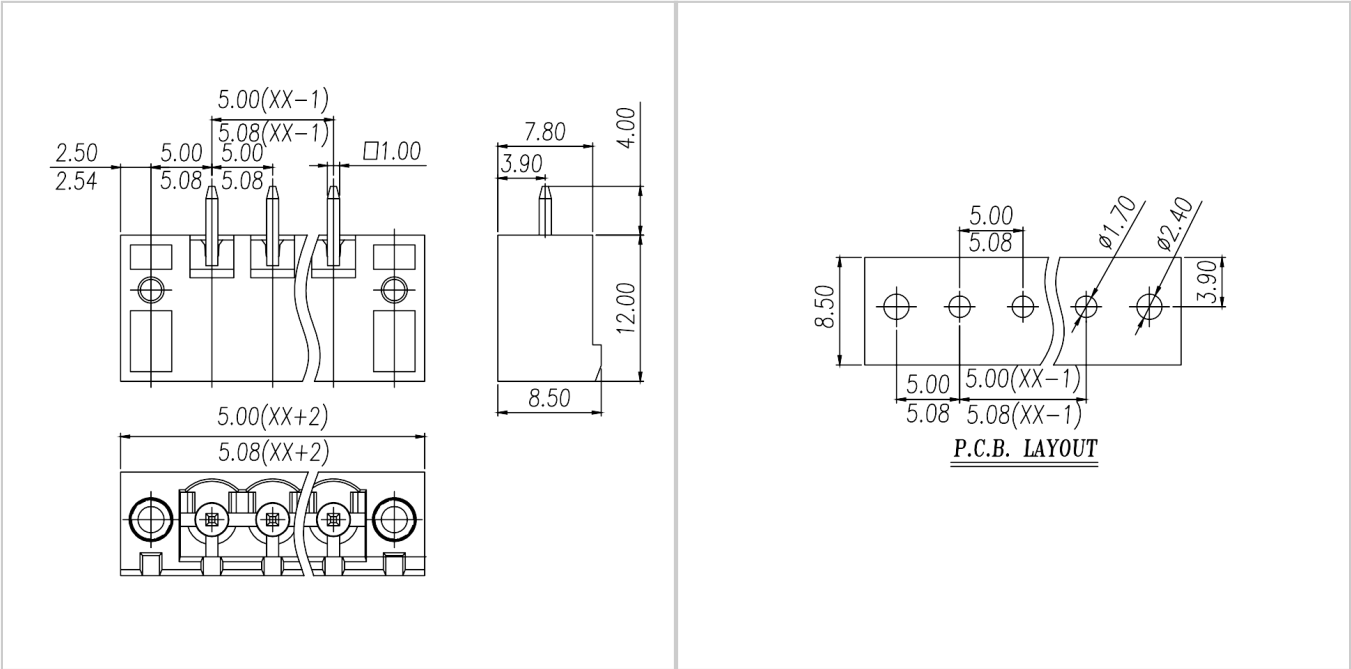

Accessories



[WJ2EDGKM-5.0/5.08](#)



[WJ2EDGKAM-5.0/5.08](#)



[WJ2EDGKBM-5.0/5.08](#)




[WJ2EDGKCM-5.0/5.08](#)



[WJ2EDGKDM-5.0/5.08](#)



[WJ2EDGKDAM-5.0/5.08](#)



[WJ2EDGKDBM-5.0/5.08](#)



[WJ2EDGKDHM-5.08](#)




[WJ2EDGKHM-5.08](#)



[WJ2EDGKAHM-5.08](#)



[WJ2EDGKZM-5.0/5.08](#)



[WJ2EDGKLM-5.0/5.08](#)