


WJ15EDGK-2.54
PLUG-IN TERMINAL BLOCK

Download date : 2024-05-05



PCB connector
Rated current: 5 A
Rated voltage: 150 V
Wire range: 26-20 AWG
Pitch: 2.54 mm

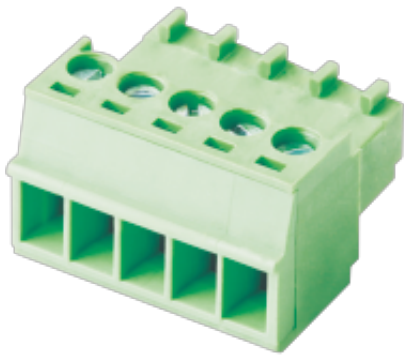

For reference only!version1.0

UL/CUL

Use Group	B	C	D
Rate Voltage [V]	150	-	-
Rated Current [A]	5	-	-
Wire Range [AWG]	26-20		
Dielectric Voltage-Withstand	1.3KV		

IEC

Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	100	160	320
Rated Current [A]	5	5	5
Impulse withstand voltage [KV]	1.5	2.5	2.5
Conductor cross section[solid/flexible] [mm²]	0.2-0.5		

Material


Insulation Material	PA66
---------------------	------

Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated


Other Data

Pitch/Poles [mm]/[P]	2.54/2-24
Stripping Length [mm]	5-6
Screw/Torque(Max)[N.m]	M1.6/0.1
Operating temperature [°C]	-40~+105
Soldering temperature	/
Pin dimensions [mm]	/
PCB Hole Diameter [mm]	/

Dimensions

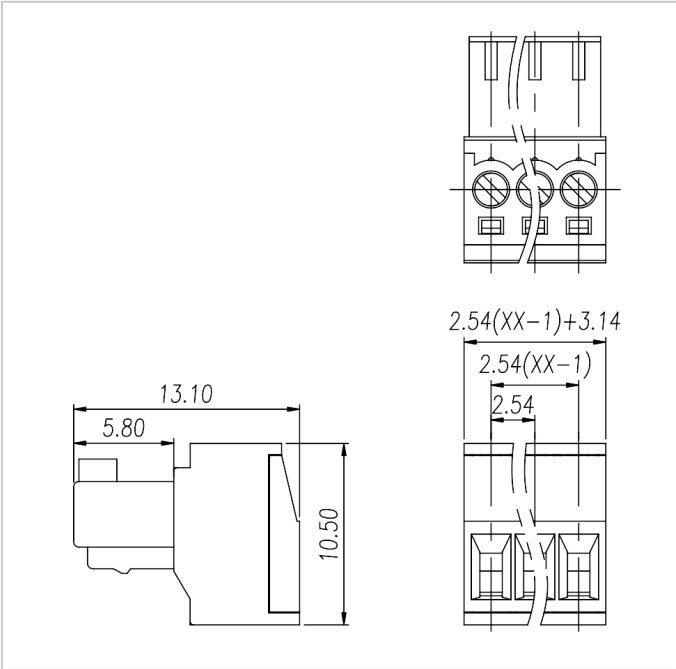

Accessories



[WJ15EDGVC-2.54](#)



[WJ15EDGRC-2.54](#)