

Electrical Diagram :



For reference only!version1.0

CUL Technical Data (UL1059)

Wire Range	18-2AWG
------------	---------

IEC Technical Data (IEC 60947-7-2)

Overvoltage Category	III
Contamination Class	3

Conductor cross section

Soild	10-35mm ²
Flexible	10-35mm ²
Flexible with ferrule	10-35mm ²


Material

Insulation Material	PA66
Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Ni plated


Other Data

Length/Height/Thickness [mm]	50.0/61.8/15.2
Connection Points	2
Stripping Length [mm]	16-17
Type of rail	DIN 35/32
Screw/Torque(Max)[N.m]	M6/3.2-3.7
Operating temperature [°C]	-40~+105


Dimensions

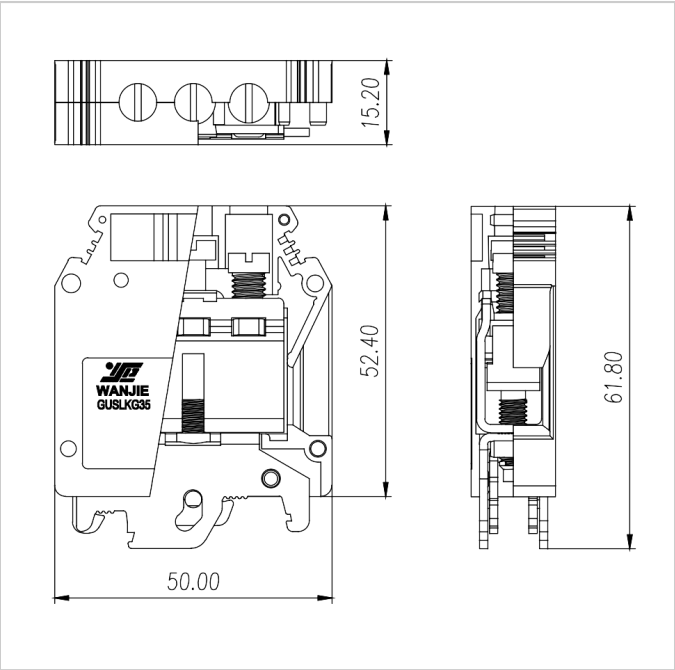

Accessories



[EB-35](#)



[EW-35](#)



[DGL2-35x7.5A](#)



[DGL2-35x7.5B](#)



[DGL2-35x7.5C](#)



[DGL2-35x7.5D](#)



[MUV10-10](#)



[DGS1-35x7.5W4.2x12](#)

[DGS1-35x7.5W5.2x15](#)

[DGS1-35x7.5W](#)