






慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

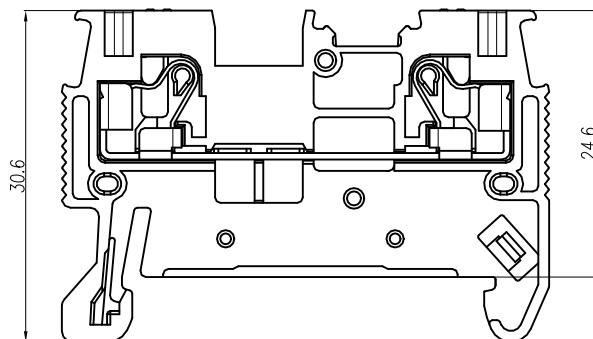

UL/CUL 技术参数 (UL1059)				
UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	300	600
额定电流	Rated Current [A]	15	15	5
耐电压	Withstanding Voltage	1600V/1Min		
接线范围	Wire Range	26-14		
单/多芯线	Solid/Stranded [AWG]			
IEC 技术参数 (IEC60947-7-1/2)		IEC 60947-7-1		
IEC Technical Data				
过电压类别	Overvoltage Category	III		
污染等级	Contamination Class	3		
额定电压	Rated Voltage [V]	500		
额定电流	Rated Current [A]	17.5		
额定冲击电压	Impulse withstand voltagea [KV]	6		
导线截面积	Conductor cross section			
单芯	Solid [mm²]	0.2-1.5		
柔性导线	flexible [mm²]	0.2-1.5		
柔性导线带冷压头	flexible with ferrule [mm²]	0.2-1.0		
材料	Material			
绝缘材料	Insulation Material	PA66		
阻燃等级	Imflammability	UL94V-0		
导体材料	Contact Material	铜合金 Copper alloy		
导体表面镀层	Contactive Coating	镀锡 Sn Plated		
一般参数	Other Data			
连接点数	connection points	2		
剥线长度	Stripping Length [mm]	8-10		
导轨类型	Type of rail	DIN 35		
螺丝 Screw/扭矩 Torque(Max)	[N.m]	--		
工作温度	Operating temperatur [°C]	-40-105		

红色/Red	GUUV1.5-102-RD-00A
黑色/Black	GUUV1.5-102-BK-00A
黄色/Yellow	GUUV1.5-102-YE-00A
绿色/Green	GUUV1.5-102-GN-00A
橙色/Orange	GUUV1.5-102-OG-00A
蓝色/Blue	GUUV1.5-102-BU-00A
灰色/Grey	GUUV1.5-102-GY-00A
颜色/Color	订货号 /Order NO.

linear dimension(Tolerances Standard GB/T 14486-2008)									
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角 / THIRD ANGLE PROJECTION		版本 / REV	V0
								REV	V0
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						名称 / TITLE	GUV1.5-102-XX-00A		