
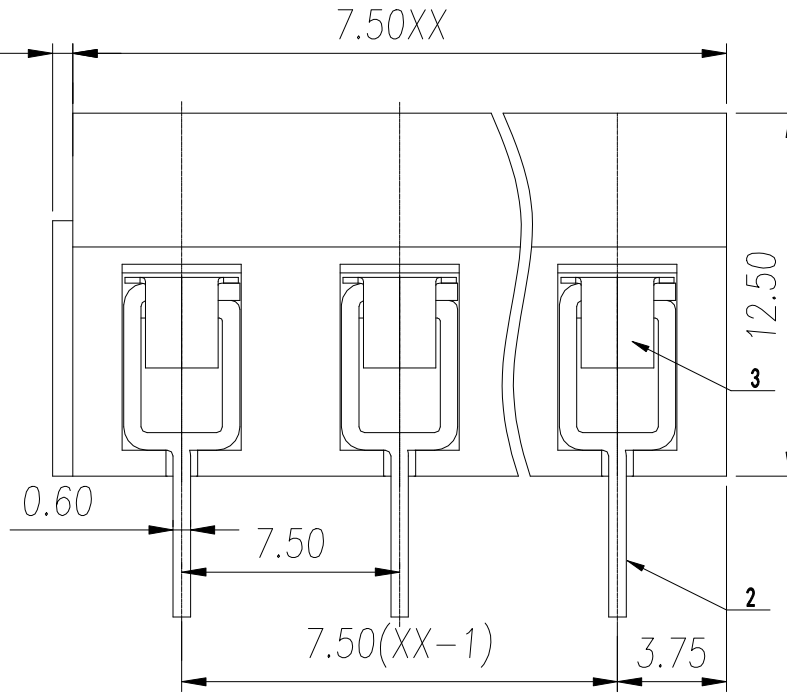
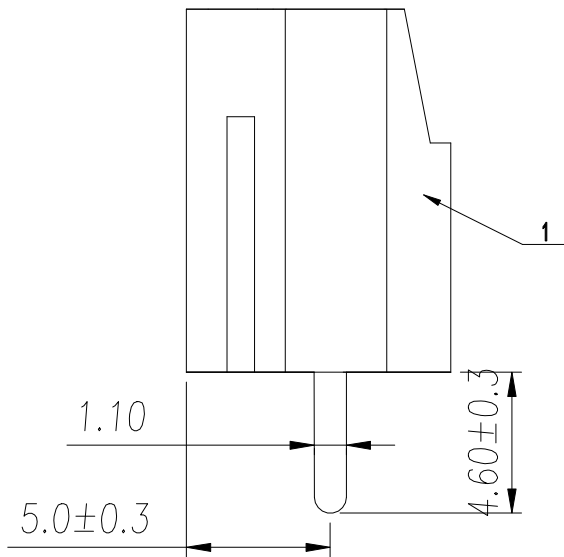
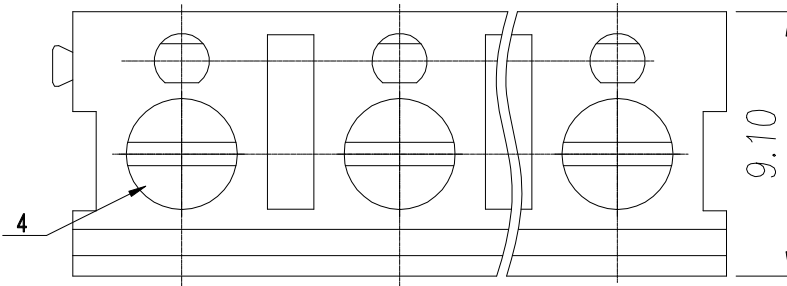


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除特授予明确授权，否则，禁止以任何形式复制、利用、交流本文件的内容，侵犯者将承担法律责任。本公司保留追究侵权者法律责任的权利。所有权利保留。

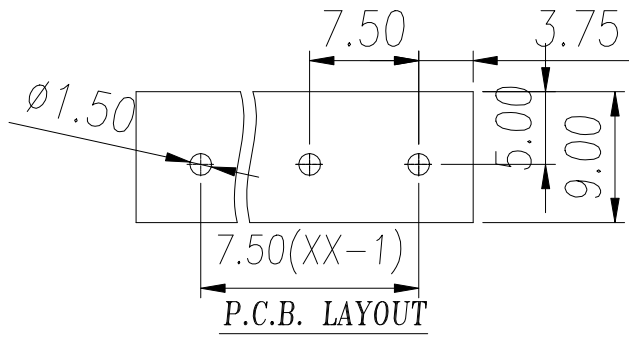

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		WangP	23.10.30

UL/CUL 技术参数		UL/CUL Technical Data					
等级	Use Group		B	C	D		
额定电压	Rated Voltage	[V]	250	-	250		
额定电流	Rated Current	[A]	16	-	10		
接线范围	Wire Range		22-14				
单/多芯线	Solid/Stranded	[AWG]					
耐电压	Withstanding Voltage		1500V/1Min				
IEC 技术参数							
IEC Technical Data							
过电压类别	Overvoltage Category		III	III	II		
污染等级	Contamination Class		3	2	2		
额定电压	Rated Voltage	[V]	250	400	630		
额定电流	Rated Current	[A]	24	24	24		
额定冲击电压	Impulse withstand voltage	[KV]	4.0	4.0	4.0		
导线截面积	Conductor cross section		0.5-2.5				
硬质/柔性导线	Solid/ flexible	[mm²]					
一般参数 Other Data							
间距	Pitch / 极数	Poles [mm]/[P]	7.5 / 02~24				
剥线长度	Stripping Length	[mm]	5~6				
螺丝	Screw/ 扭矩	Torque(Max) [N.m]	M2.5/0.3				
工作温度	Operating temperature	[°C]	-40~105				
焊锡温度	Soldering temperature		260°C/5S				

General Tolerances

variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 1000	tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60								

4	Screw	Steel	M2.5	DES.	WangP	DATE	23.10.30	UNITS	mm	THIRD ANGLE PROJECTION	
3	Spring	Stainless Steel		CHK.	YangHJ	DATE	23.10.30	SIZE	A4	TYPE: CUSTOMER DRAWING	
2	Header Pin	Copper Alloy	M2.5/Sn Plated	APP.	JASON	DATE	23.10.30	SCALE	4:1	DRAWING TYPE: SP-03	
1	Housing	PA66	UL94V-0	慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD		PART NO.: WJ375-7.5-XXP-1Y-00A		SHEET 1 of 1		REV	
ITEM	NAME OF PART	MATERIAL	NOTES								