
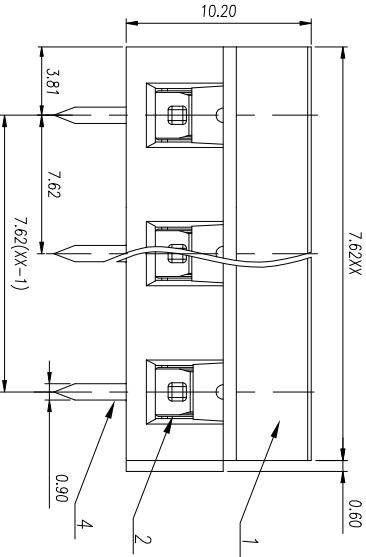
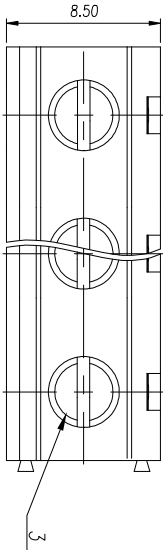
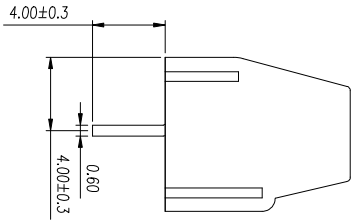


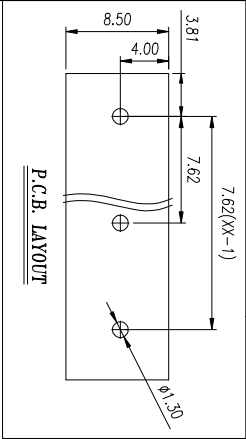

REVISION RECORD			
REV.	ESCRIPTION	ECN No.	APPROVED
V0		CV	DATE
新发行			24.03.29

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage	[V]	300	-
额定电流	Rated Current	[A]	12	-
接线范围	Wire Range	26-14		
单/多芯线	Solid/Stranded	[AWG]		
耐电压	Withstanding Voltage	1600V/1Min		

IEC 技术参数

IEC Technical Data

过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage	[V]	450	630
额定电流	Rated Current	[A]	17.5	17.5
额定冲击电压	Impulse withstand voltage	[kV]	4.0	4.0

导线截面积	Conductor cross section	0.5-1.5		
硬质/柔性导线	Solid/flexible	[mm ²]		

一般参数 Other Data

间距	Pitch / 极数	Poles	[mm]/[P]	7.62/02-24
剥线长度	Stripping Length		[mm]	5-6
螺丝	Screw/扭矩	Torque(Max)	[N.m]	M3.0/0.5
工作温度	Operating temperature	[°C]	-40~105	
焊接温度	Soldering temperature	260°C/5S		

General Tolerances

variable range	6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10
	1	2	3	4	5	6	7	8

4	Header pin	Copper Alloy	Sn Plated
3	Screw	Steel	M3Zn Plated
2	Cage	Copper Alloy	M3INi Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	CV	DATE	UNITS	THIRD ANGLE PROJECTION
CHK.	YANGHU	DATE	SIZE	A4
APP.	JASON	DATE	SCALE	2.5:1
WANJIJE 慈溪市万捷电子有限公司 CXM WANJIE ELECTRONIC CO., LTD				PART NO.: WJ127-7.62-XXP-1Y-00A