

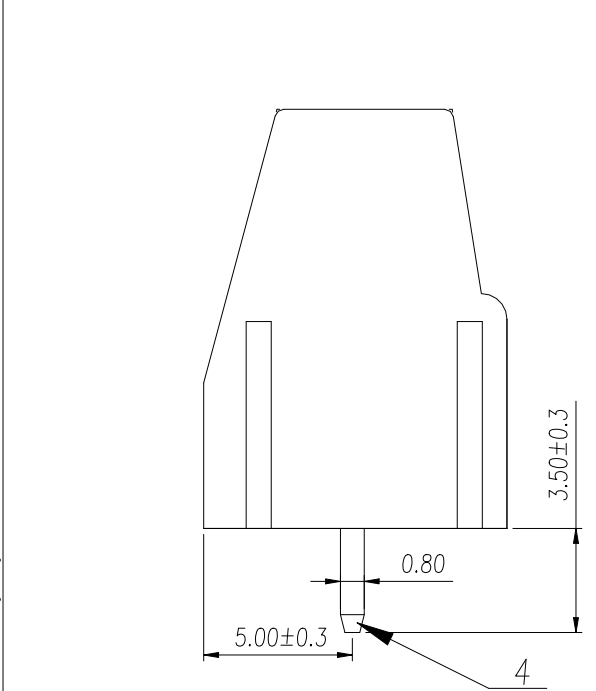


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除经给予明确授权，否则禁止转让、复制、利用、交流本文件的内容。侵犯者将负赔偿责任。本公司保留对涉及发明、实用新型和外观专利的所有权利。

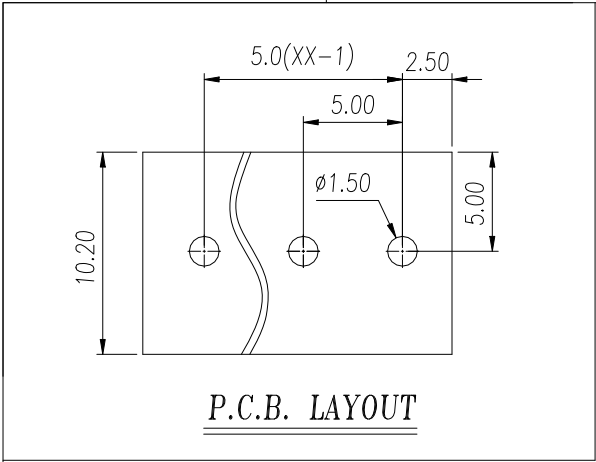

General Tolerances								— ▯ ⊥		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

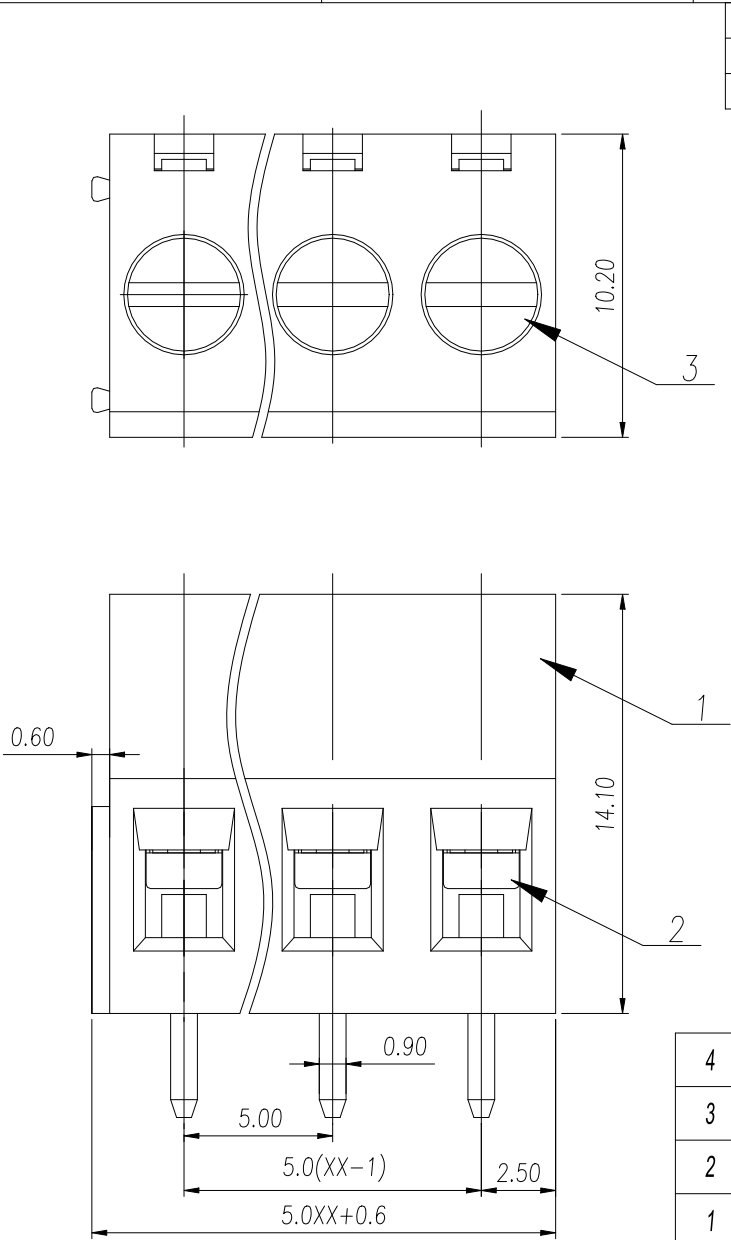

REVISION RECORD											
REV.		ESCRIPTION				ECN No.		APPROVED	DATE		
V0		新发行						CY	23.11.22		
		UL/CUL 技术 参数									
		UL/CUL Technical Data									
		等 级		Use Group		B	C	D			
		额定电压		Rated Voltage		[V]	300	-	300		
		额定电流		Rated Current		[A]	16	-	10		
		接线范围		Wire Range		22-12					
		单/多芯线		Solid/Stranded						[AWG]	
		耐电压		Withstanding Voltage		1600V/1Min					
		IEC 技术参数									
		IEC Technical Data									
		过电压类别		Overvoltage Category		III	III	II			
		污染等级		Contamination Class		3	2	2			
		额定电压		Rated Voltage		[V]	250	400	630		
		额定电流		Rated Current		[A]	20	20	20		
		额定冲击电压		Impulse withstand voltage		[KV]	4.0	4.0	4.0		
		导线截面积		Conductor cross section		0.5-2.5					
		硬质/柔性导线		Solid/ flexible						[mm²]	
		一般参数				Other Data					
		间距		Pitch /极数		Poles	[mm] / [P]	5.0 / 02~24			
		剥线长度		Stripping Length		[mm]		6~7			
		螺丝		Screw/扭矩		Torque(Max)	[N.m]	M2.5/0.4			
		工作温度		Operating temperature		[°C]		-40~105			
		焊锡温度		Soldering temperature		260°C/5S					
		Header pin		Copper Alloy				Sn Plated			
		Screw		Steel				M2.5/Zn Plated			
		Cage		Copper Alloy				M2.5/Ni Plated			
		Housing		PA66				UL94V-0			
		NAME OF PART		MATERIAL				NOTES			
CY	DATE	23.11.22	UNITS	mm	THIRD ANGLE PROJECTION						
YangHJ	DATE	23.11.22	SIZE	A4	TYPE: CUSTOMER DRAWING				SHEET 1 of 1		
JASON	DATE	23.11.22	SCALE	4:1	DRAWING TYPE: SP-03				REV V0		
 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD					PART NO.: WJ128-5.0-XXP-1Y-00A						