
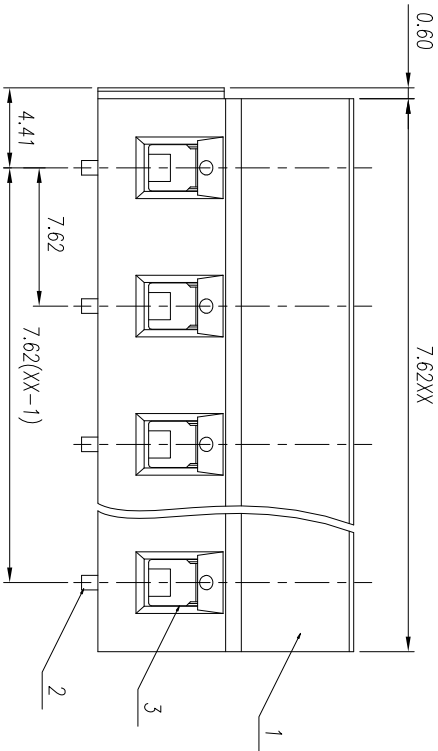
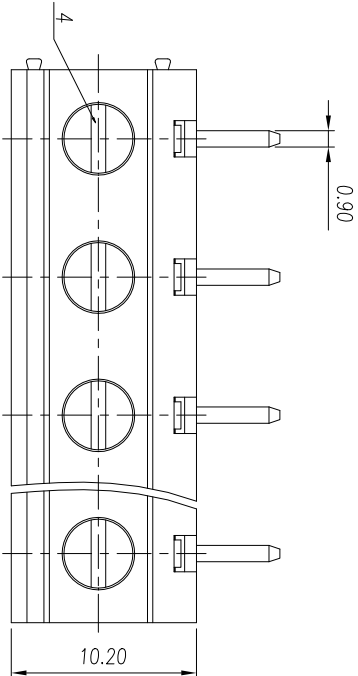
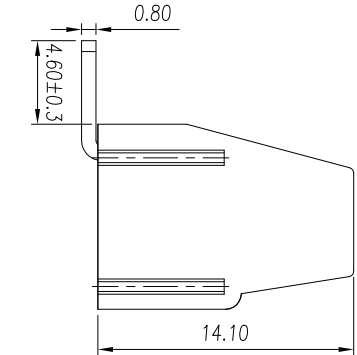


REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		CY	24.03.13

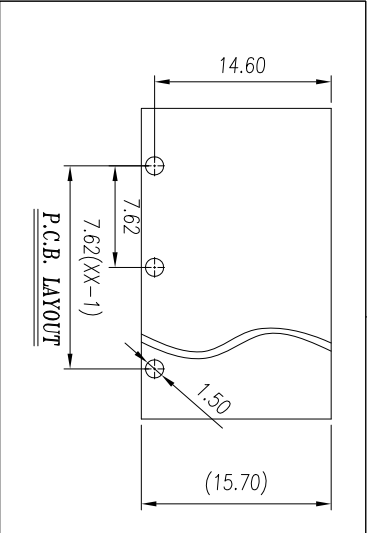

A

UL/CUL 技术参数		cULus®			
UL/CUL Technical Data					
等级	Use Group	B	C	D	
额定电压	Rated Voltage	[V]	300	-	300
额定电流	Rated Current	[A]	16	-	10
接线范围	Wire Range	22-12			
单/多芯线	Solid/Stranded	[AWG]			
耐电压	Withstanding Voltage	1600V/1Min			

B

IEC 技术参数					
IEC Technical Data					
过电压类别	Overvoltage Category	III	III	II	
污染等级	Contamination Class	3	2	2	
额定电压	Rated Voltage	[V]	450	630	1000
额定电流	Rated Current	[A]	20	20	20
额定冲击电压	Impulse withstand voltage	[kV]	6.0	6.0	6.0
导线截面积					
硬度/柔性导线	Solid/flexible	[mm²]	0.5-2.5		

一般参数 Other Data				
间距 Pitch	极数 Poles	[mm] / [P]	7.62 / 02-24	
剥线长度 Stripping Length		[mm]	6-7	
螺丝 Screw/扭矩 Torque(Max)		[N.m]	M2.5/0.4	
工作温度 Operating temperature		[°C]	-40~105	
焊接温度 Soldering temperature			260°C/5S	

C

General Tolerances								—		⊥
		over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160		over 10 to 100	over 100 to	
variable range	to 6	6 to 10	10 to 30	30 to 60	60 to 100	100 to 160		10 to 100	100 to	
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

D

4	Screw	Steel	M2.5/In Plated
3	Cage	Copper Alloy	M2.5/IN Plated
2	Header Pin	Copper Alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	CY	DATE	24.03.13	UNITS	mm	THIRD ANGLE PROJECTION
CHK	YangHJ	DATE	24.03.13	SIZE	A4	TYPE: CUSTOMER DRAWING
APP.	JASON	DATE	24.03.13	SCALE		DRAWING TYPE: SP-03
WANJI 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ128R-7.62-XXP-1Y-00A