

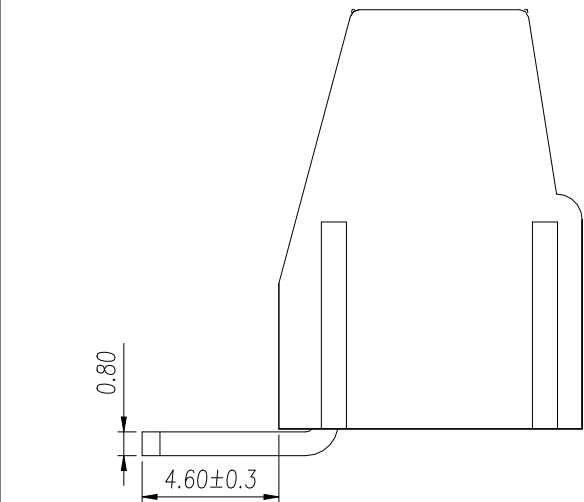
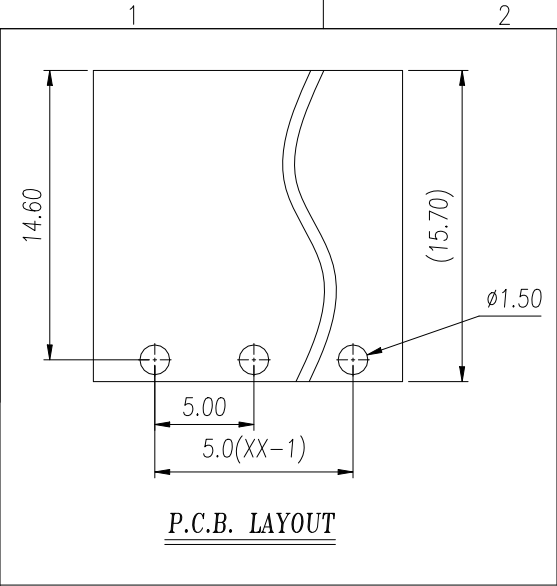


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除特别声明外，未经许可，不得复制或传播本文件内容。侵犯者将承担法律责任。 使用新型和外观设计专利的所有权利。

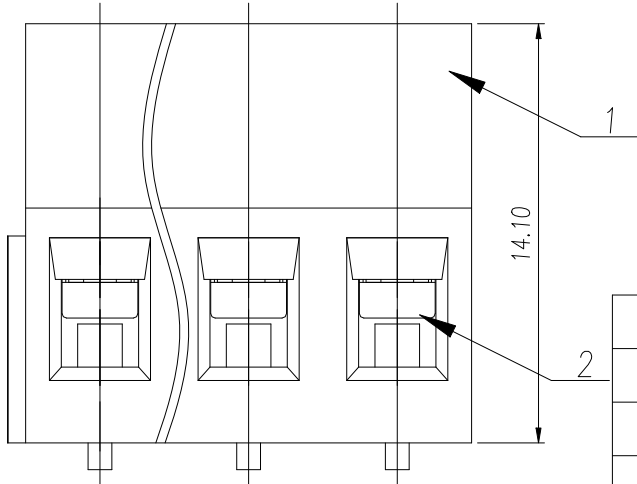

General Tolerances								—	∇	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

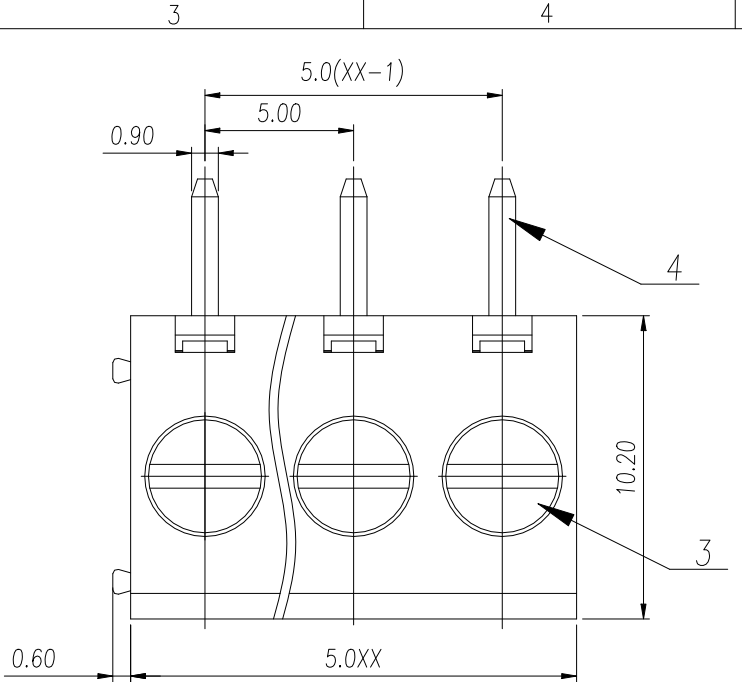

2					6				
REVISION RECORD									
REV.	ESCRPTION				ECN No.	APPROVED		DATE	
V0	新发行					CY		23.11.21	
UL/CUL 技术参数 UL/CUL Technical Data									
等 级		Use Group			B	C	D		
额定电压		Rated Voltage [V]			300	-	300		
额定电流		Rated Current [A]			16	-	10		
接线范围		Wire Range			22-12				
单/多芯线		Solid/Stranded [AWG]							
耐电压		Withstanding Voltage			1600V/1Min				
IEC 技术参数 IEC Technical Data									
过电压类别		Overvoltage Category			III	III	II		
污染等级		Contamination Class			3	2	2		
额定电压		Rated Voltage [V]			250	400	630		
额定电流		Rated Current [A]			20	20	20		
额定冲击电压		Impulse withstand voltage [KV]			4.0	4.0	4.0		
导线截面积		Conductor cross section			0.5-2.5				
硬质/柔性导线		Solid/ flexible [mm²]							
一般参数 Other Data									
间距 Pitch /极数		Poles [mm] / [P]			5.0 / 02~24				
剥线长度		Stripping Length [mm]			6~7				
螺丝 Screw/扭矩		Torque(Max) [N.m]			M2.5/0.4				
工作温度		Operating temperature [°C]			-40~105				
焊锡温度		Soldering temperature			260°C/5S				
Header pin				Copper Alloy			Sn Plated		
Screw				Steel			M2.5/Zn Plated		
Cage				Copper Alloy			M2.5/Ni Plated		
Housing				PA66			UL94V-0		
NAME OF PART				MATERIAL			NOTES		
CY	DATE	23.11.21	UNITS	mm	THIRD ANGLE PROJECTION				
YangHJ	DATE	23.11.21	SIZE	A4	TYPE: CUSTOMER DRAWING				SHEET 1 of 1
JASON	DATE	23.11.21	SCALE	4:1	DRAWING TYPE: SP-03				REV V0
 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD					PART NO.: WJ128R-5.0-XXP-1Y-00A				