
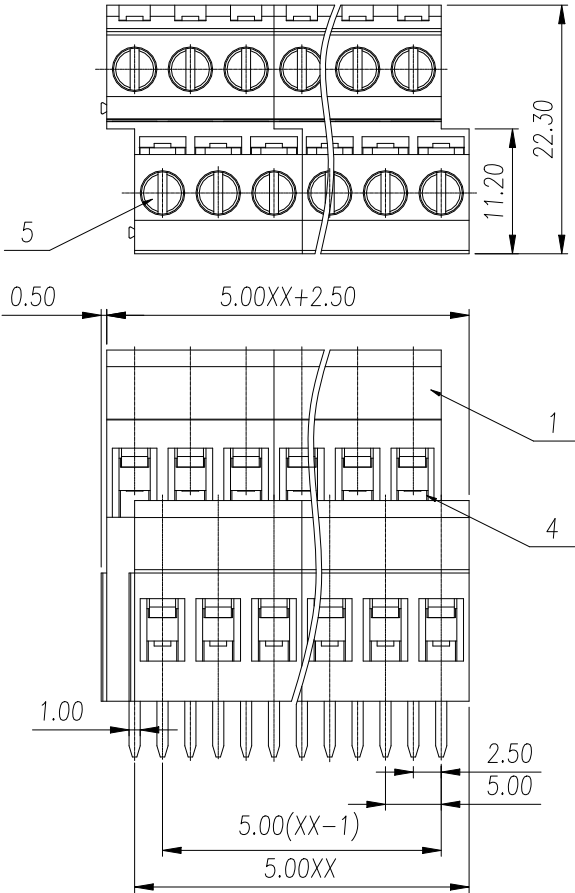
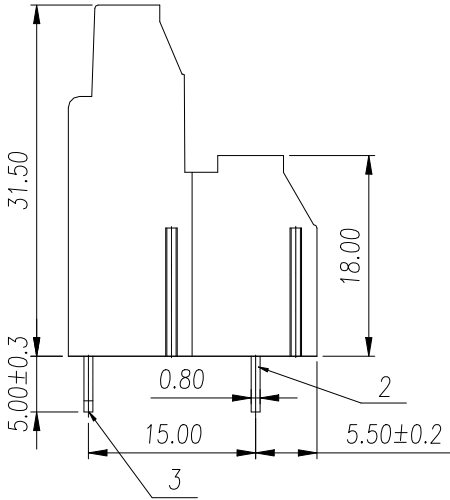


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权，否则禁止转让、复制、利用、交流本文件的内容。侵犯者将承担赔偿责任。 本公司保留对涉及发明、实用新型和外观专利的所有权利。

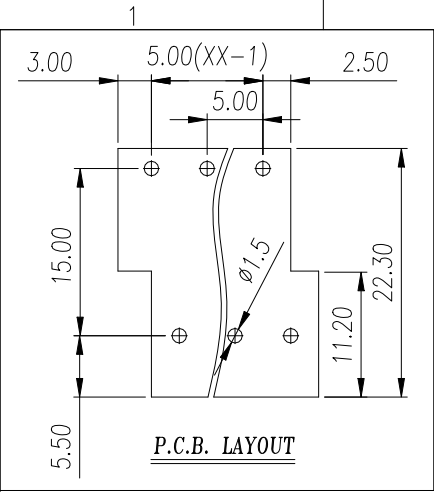

General Tolerances								— ▯ ⊥		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

5	Screw	Steel	M3/Zn Plated
4	Cage	Copper Alloy	M3/ Ni Plated
3	Header Pin	Copper Alloy	Sn Plated
2	Header Pin	Copper Alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		WangP	23.11.29

UL/CUL 技术参数
UL/CUL Technical Data

等级 Use Group

B C D

额定电压 Rated Voltage [V]

300 - 300

额定电流 Rated Current [A]

20 - 10

接线范围 Wire Range

单/多芯线 Solid/Stranded [AWG]

26-12

耐电压 Withstanding Voltage

1600V/1Min

IEC 技术参数
IEC Technical Data

过电压类别 Overvoltage Category

III III II

污染等级 Contamination Class

3 2 2

额定电压 Rated Voltage [V]

250 400 630

额定电流 Rated Current [A]

20 20 20

额定冲击电压 Impulse withstand voltage [KV]

4.0 4.0 4.0

导线截面积 Conductor cross section

硬质/柔性导线 Solid/ flexible [mm²]

0.5-2.5

一般参数 Other Data

间距 Pitch /极数 Poles [mm]/ [P]

5.0 / 2*02-2*24

剥线长度 Stripping Length [mm]

6~7

螺丝 Screw/ 扭矩 Torque(Max) [N.m]

M3/0.5

工作温度 Operating temperature [°C]

-40~105

焊锡温度 Soldering temperature

260°C/5S

慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

WANGJIE

WANGJIE

PART NO.:

WJ130T2A-5.0-2*XXP-1Y-00A

DES. WangP DATE 23.11.29 UNITS mm THIRD ANGLE PROJECTION

CHK. YangHJ DATE 23.11.29 SIZE A4 TYPE: CUSTOMER DRAWING SHEET 1 of 1

APP. JASON DATE 23.11.29 SCALE 1.5:1 DRAWING TYPE: SP-03 REV V0

FOR-0371 Rev.1.0