
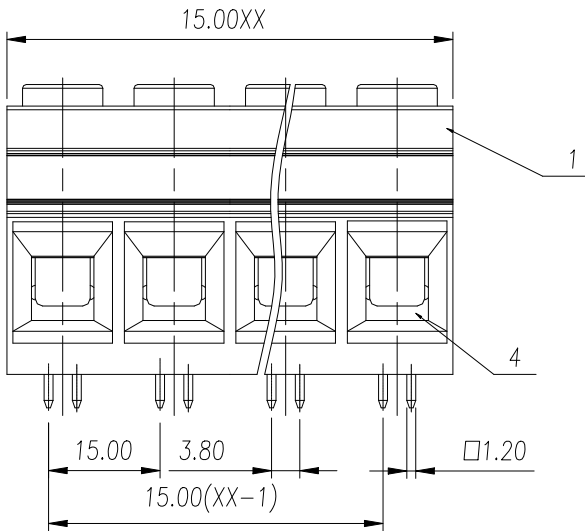
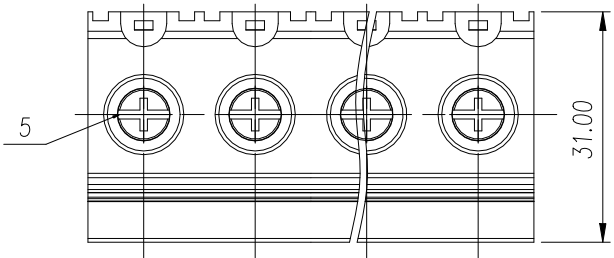
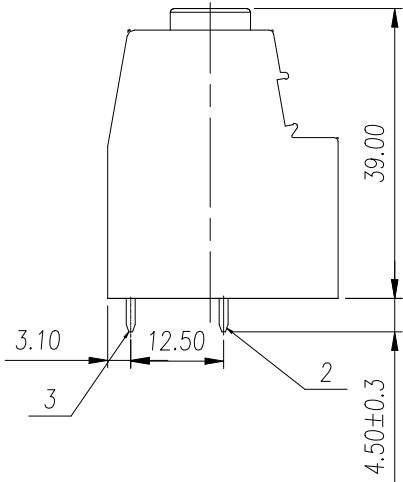


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除特别声明外，未经许可，不得复制或传播本文件内容。侵犯者将承担法律责任。 本公司保留对涉及发明、实用新型和外观设计的所有权利。

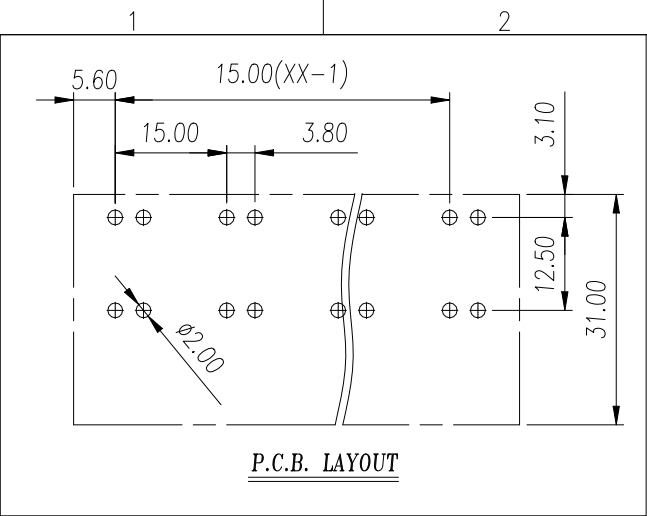

General Tolerances								— ▯ ⊥		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

5	Screw	Steel	M5/Zn Plated
4	Cage	Steel	M5/Zn Plated
3	Header Pin	Copper Alloy	Sn Plated
2	Header Pin	Copper Alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	WangP	DATE	23.11.29	UNITS	mm	THIRD ANGLE PROJECTION	
CHK.	YangHJ	DATE	23.11.29	SIZE	A4	TYPE: CUSTOMER DRAWING	
APP.	JASON	DATE	23.11.29	SCALE	1:1	DRAWING TYPE: SP-03	
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ118-15.0-XXP-1Y-00A	
FOR-0371 Rev.1.0						SHEET 1 of 1	
						REV	V0

REVISION RECORD					
REV.	DESCRIPTION		ECN No.	APPROVED	DATE
V0	新发行			WangP	23.11.29

UL/CUL 技术参数		cULus		
UL/CUL Technical Data				
等 级	Use Group	B	C	D
额定电压	Rated Voltage [V]	600	600	600
额定电流	Rated Current [A]	115	115	5
接线范围	Wire Range	20-2		
单/多芯线	Solid/Stranded [AWG]			
耐电压	Withstanding Voltage	2200V/1Min		
IEC 技术参数		IEC60947-7-4		
IEC Technical Data				
过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	1000	1000	1000
额定电流	Rated Current [A]	125	125	125
额定冲击电压	Impulse withstand voltage [KV]	8.0	8.0	8.0
导线截面积	Conductor cross section	0.5-35		
硬质/柔性导线	Solid/ flexible [mm²]			
一般参数 Other Data				
间距 Pitch / 极数 Poles	[mm] / [P]	15.0 / 01~12		
剥线长度 Stripping Length	[mm]	17~18		
螺丝 Screw/ 扭矩 Torque(Max)	[N.m]	M5/2.0		
工作温度 Operating temperature	[°C]	-40~105		
焊锡温度 Soldering temperature		260°C/5S		



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

PART NO.:
WJ118-15.0-XXP-1Y-00A