

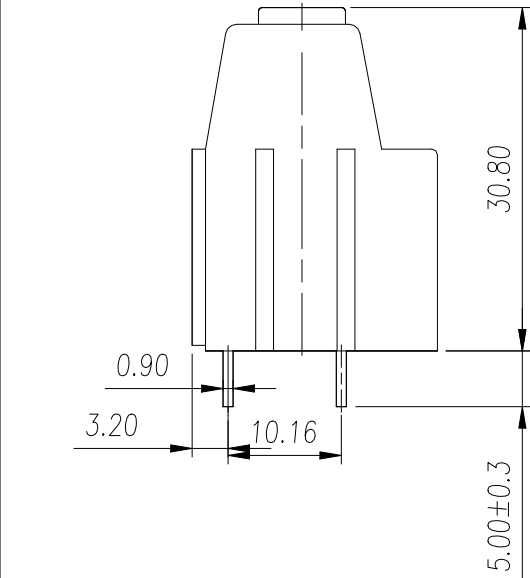
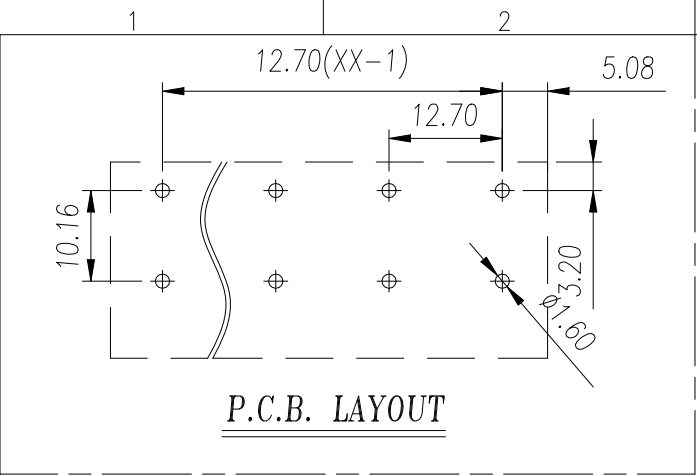


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除获给予明确授权, 否则禁止转让、复制、利用、交流本文件的内容。侵犯者将负赔偿责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。

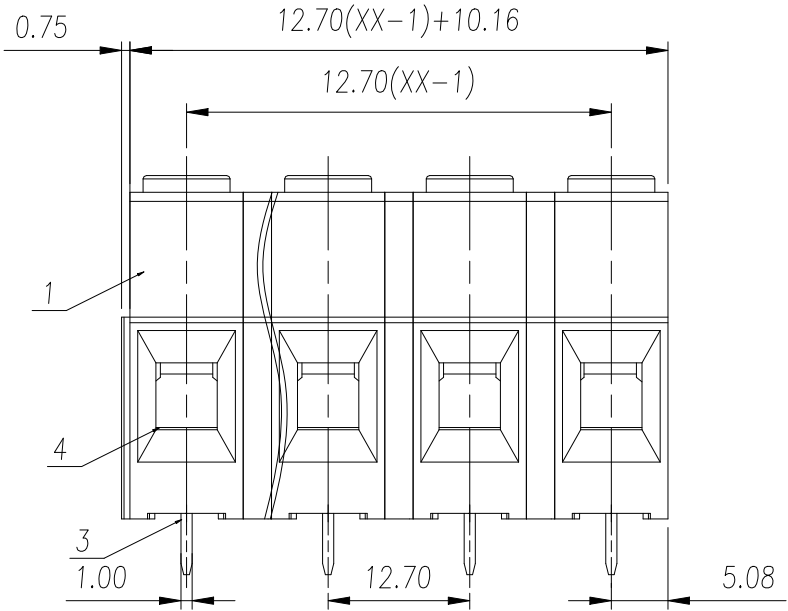

General Tolerances								— ▯ ⊥		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

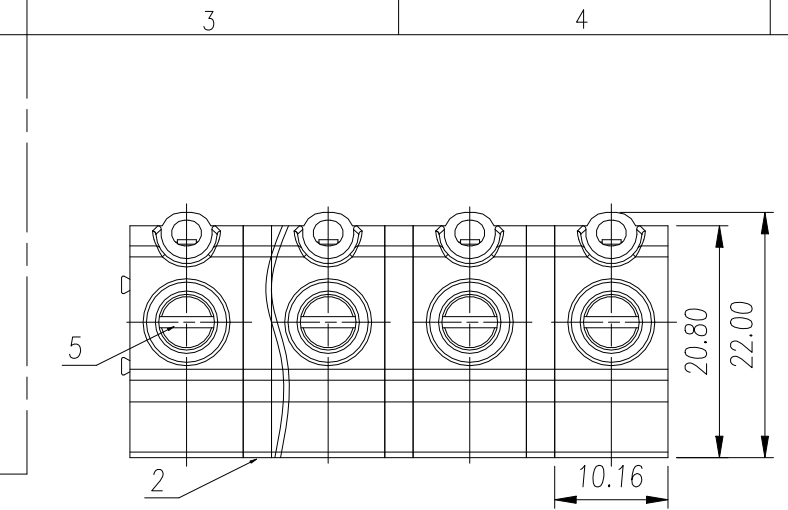

5	Screw	Steel	M4/Zn Plated
4	Cage	Copper Alloy	M4/Ni Plated
3	Header Pin	Copper Alloy	Sn Plated
2	Clapboard	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	WangP	DATE	23.12.01	UNITS	mm	THIRD ANGLE PROJECTION	⌀		
CHK.	YangHJ	DATE	23.12.01	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1		
APP.	JASON	DATE	23.12.01	SCALE	1.5:1	DRAWING TYPE: SP-03	REV	V0	

慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ116VK-12.7-XXP-1Y-00A			
--	--	--	--	--	--	--------------------------------------	--	--	--

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		WangP	23.12.01

UL/CUL 技术参数			UL/CUL Technical Data					
等级	Use Group		B	C	D			
额定电压	Rated Voltage	[V]	600	600	600			
额定电流	Rated Current	[A]	65	65	5			
接线范围	Wire Range		20-6					
单/多芯线	Solid/Stranded	[AWG]						
耐电压	Withstanding Voltage		2200V/1Min					
IEC 技术参数								
IEC Technical Data								
过电压类别	Overvoltage Category		III	III	II			
污染等级	Contamination Class		3	2	2			
额定电压	Rated Voltage	[V]	630	1000	1000			
额定电流	Rated Current	[A]	76	76	76			
额定冲击电压			8.0	8.0	8.0			
Impulse withstand voltagea		[KV]						
导线截面积	Conductor cross section		2.5-16					
硬质/柔性导线	Solid/ flexible	[mm²]						
一般参数 Other Data								
间距 Pitch /极数 Poles		[mm] / [P]	12.7 / 02~14					
剥线长度 Stripping Length		[mm]	10					
螺丝 Screw/ 扭矩 Torque(Max)		[N.m]	M4/1.2					
工作温度 Operating temperature		[°C]	-40~105					
焊锡温度 Soldering temperature			260°C/5S					