
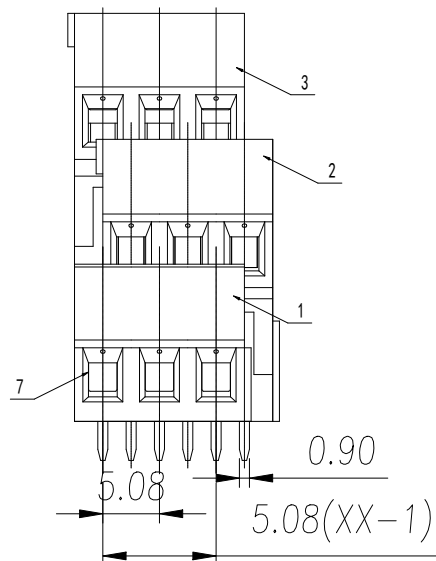


General Tolerances								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
	tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30

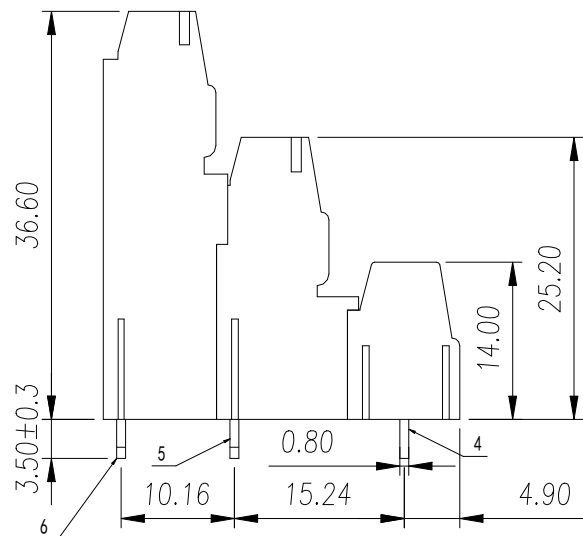

REVISION RECORD									
REV.	DESCRIPTION				ECN No.	APPROVED	DATE		
V0	新发行					WangP	24.03.20		
UL/CUL 技术参数 UL/CUL Technical Data									
等 级		Use Group			B	C	D		
额定电压		Rated Voltage [V]			300	-	300		
额定电流		Rated Current [A]			15	-	10		
接线范围		Wire Range			30-14				
单/多芯线		Solid/Stranded [AWG]							
耐电压		Withstanding Voltage			1600V/1Min				
IEC 技术参数 IEC Technical Data									
过电压类别		Overvoltage Category			III	III	II		
污染等级		Contamination Class			3	2	2		
额定电压		Rated Voltage [V]			250	400	630		
额定电流		Rated Current [A]			18	18	18		
额定冲击电压		Impulse withstand voltage [KV]			4.0	4.0	4.0		
导线截面积		Conductor cross section			0.5-2.5				
硬质/柔性导线		Solid/ flexible [mm²]							
一般参数 Other Data									
间距		Pitch / 极数 Poles [mm] / [P]			5.08 / 3*02~3*24				
剥线长度		Stripping Length [mm]			6~7				
螺丝		Screw/扭矩 Torque(Max) [N.m]			M2.5/0.4				
工作温度		Operating temperature [°C]			-40~105				
焊锡温度		Soldering temperature			260°C/5S				

4	Header Pin	Copper Alloy	Sn Plated
3	Housing	PA66	UL94V-0
2	Housing	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

S.	WangP	DATE	24.03.20	UNITS	mm	THIRD ANGLE PROJECTION	
K.	YangHJ	DATE	24.03.20	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
P.	JASON	DATE	24.03.20	SCALE	1:1	DRAWING TYPE: SP-03	REV V0



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

PART NO.:
WJE3K508B-5.08-3*XXP-1Y-00A