
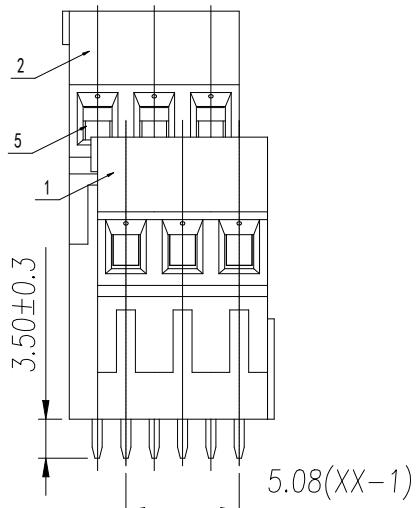
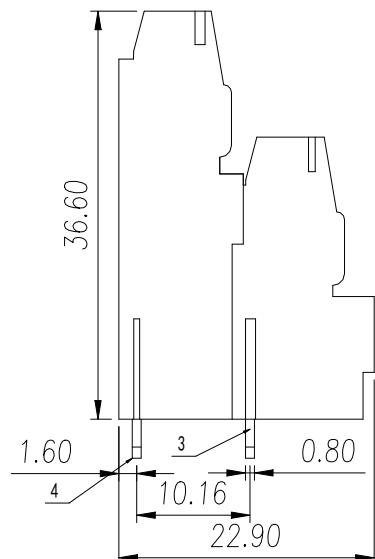
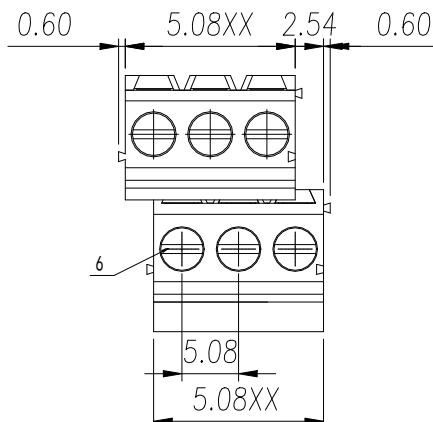


REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		WangP	24.02.20

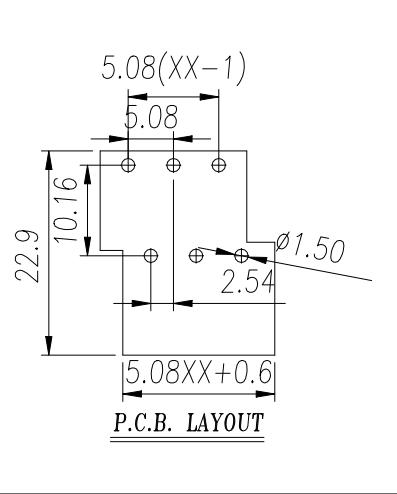

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非得到明确授权，否则禁止转让、复制、利用、交流本文件的内容。侵权者将负赔偿责任。本公司保留涉及专利、实用新型和外观设计的所有权利。

General Tolerances

variable range	to	over 6	over 10	over 30	over 60	over 100	over 160	to	over 10	over 100	over 100
		to 10	to 30	to 60	to 100	to 160	to 10		to 100	to 100	to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60	

UL/CUL 技术参数
UL/CUL Technical Data



等级 Use Group

B C D

额定电压 Rated Voltage [V]

300 - 300

额定电流 Rated Current [A]

15 - 10

接线范围 Wire Range

30-14

单/多芯线 Solid/Stranded [AWG]

1600V/1Min

耐电压 Withstanding Voltage

1600V/1Min

IEC 技术参数



IEC Technical Data

过电压类别 Overvoltage Category

III III II

污染等级 Contamination Class

3 2 2

额定电压 Rated Voltage [V]

250 400 630

额定电流 Rated Current [A]

24 24 24

额定冲击电压

Impulse withstand voltagea [KV]

4.0 4.0 4.0

导线截面积 Conductor cross section

硬质/柔性导线 Solid/ flexible [mm²]

0.5-2.5

一般参数 Other Data

间距 Pitch / 极数 Poles [mm] / [P]

5.08 / 2*02~2*24

剥线长度 Stripping Length [mm]

6~7

螺丝 Screw/扭矩 Torque(Max) [N.m]

M2.5/0.4

工作温度 Operating temperature [°C]

-40~105

ITEM	NAME OF PART	MATERIAL	NOTES
3	Header Pin	Copper Alloy	Sn Plated
2	Housing	PA66	UL94V-0
1	Housing	PA66	UL94V-0

DES.	WangP	DATE	24.02.20	UNITS	mm	THIRD ANGLE PROJECTION
CHK.	YangHJ	DATE	24.02.20	SIZE	A4	TYPE: CUSTOMER DRAWING
APP.	JASON	DATE	24.02.20	SCALE	1.5:1	DRAWING TYPE: SP-03
WANJIE						SHEET 1 of 1
						PART NO.: WJE2K508A-5.08-2*XXP-1Y-00A