
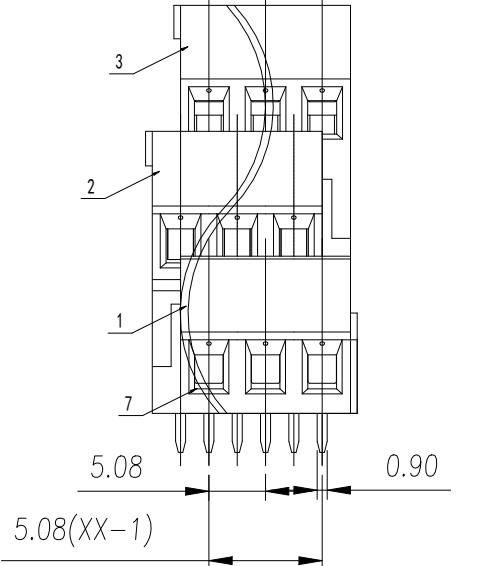


General Tolerances											
variable range	to	over 6	over 10	over 30	over 60	over 100	over 160	to	over 10	over 100	over 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60	

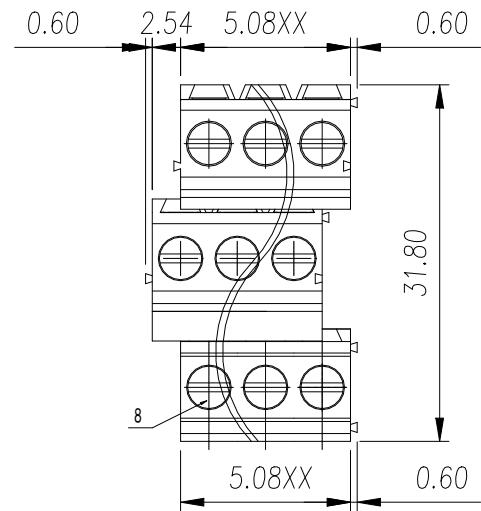

REVISION RECORD											
REV.	DESCRIPTION			ECN No.	APPROVED	DATE					
V0	新发行				WangP	23.12.01					
	UL/CUL 技术参数										
	UL/CUL Technical Data										
	等级 Use Group	B	C	D							
	额定电压 Rated Voltage [V]	300	-	300							
	额定电流 Rated Current [A]	15	-	10							
	接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	30-14									
	耐电压 Withstanding Voltage	1600V/1Min									
	IEC 技术参数										
	IEC Technical Data										
	过电压类别 Overvoltage Category	III	III	II							
	污染等级 Contamination Class	3	2	2							
	额定电压 Rated Voltage [V]	250	400	630							
	额定电流 Rated Current [A]	18	18	18							
	额定冲击电压 Impulse withstand voltage [KV]	4.0	4.0	4.0							
	导线截面积 Conductor cross section 硬质/柔性导线 Solid/ flexible [mm²]	0.5-2.5									
	一般参数 Other Data										
	间距 Pitch / 极数 Poles [mm] / [P]	5.08 / 3*02-3*24									
	剥线长度 Stripping Length [mm]	6~7									
	螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4									
	工作温度 Operating temperature [°C]	-40~105									
	焊锡温度 Soldering temperature	260°C/5S									
4	Header Pin			Copper Alloy	Sn Plated						
3	Housing			PA66	UL94V-0						
2	Housing			PA66	UL94V-0						
1	Housing			PA66	UL94V-0						
ITEM	NAME OF PART			MATERIAL	NOTES						
8	Screw			Steel	M2.5/Zn Plated	DES.	WangP	DATE	23.12.01	UNITS	mm
7	Cage			Copper Alloy	M2.5/Ni Plated	CHK.	YangHJ	DATE	23.12.01	SIZE	A4
6	Header Pin			Copper Alloy	Sn Plated	APP.	JASON	DATE	23.12.01	SCALE	1.5:1 DRAWING TYPE: SP-03
5	Header Pin			Copper Alloy	Sn Plated	慈溪市万捷电子有限公司 WANJIE CIXI WANJIE ELECTRONIC CO., LTD				REV	VO
ITEM	NAME OF PART			MATERIAL	NOTES					PART NO.: WJE3K508A-5.08-3*XXP-1Y-00A	