
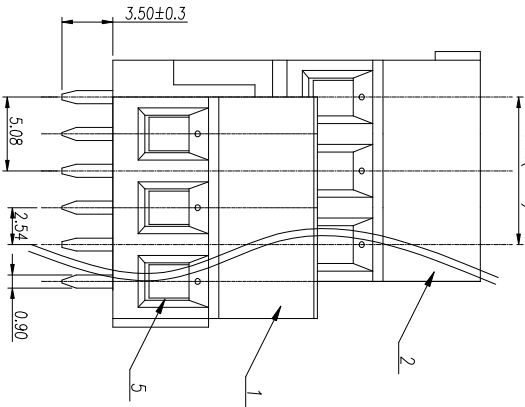
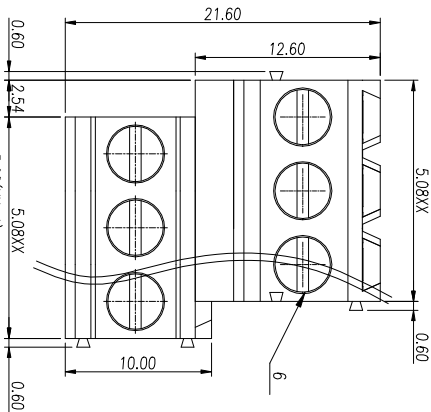
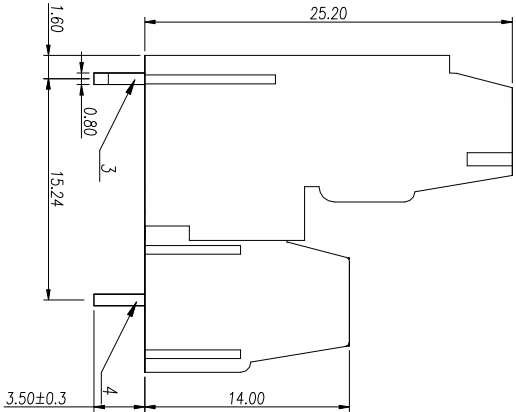


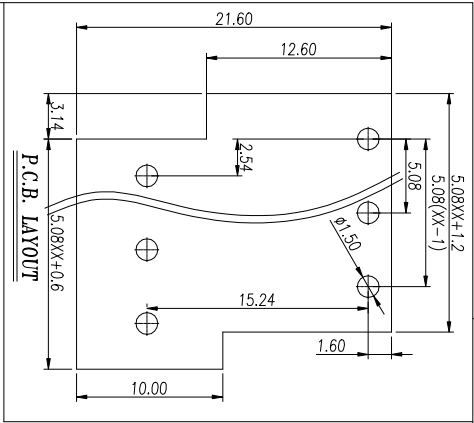

REVISION RECORD			
REV.	DESCRIPTION	ECN No.	APPROVED
V0	新发行	CV	23.11.03

UL/CUL 技术参数
UL/CUL Technical Data

cPUL[®]us

等级	Use Group	B	C	D
额定电压	Rated Voltage	[V]	300	- 300
额定电流	Rated Current	[A]	15	- 10
接线范围	Wire Range	30-14		
单/多芯线	Solid/Stranded	[AWG]	1600V/1Min	
耐压	Withstanding Voltage			

IEC 技术参数
IEC Technical Data

过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage	[V]	250	400 630
额定电流	Rated Current	[A]	24	24 24

额定冲击电压	Impulse withstand voltage	[kV]	4.0	4.0	4.0
导线截面积	Conductor cross section	0.5-2.5			
硬质/柔性导线	Solid/flexible	[mm ²]			

一般参数 Other Data					
间距 Pitch /极数 Poles	[mm]/ [P]	5.08 / 2*02-2*24			
剥线长度 Stripping Length	[mm]	6-7			
螺丝 Screw/扭矩 Torque(Max)	[N.m]	M2.5/0.4			
工作温度 Operating temperature	[°C]	-40~105			
焊锡温度 Soldering temperature		260°C/5S			

General Tolerances

variable range	6 to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to
Tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30 0.60

6	Screw	Steel	M2.5/2n Plated
5	Cage	Copper Alloy	M2.5/Ni Plated
4	Header Pin	Copper Alloy	Sn Plated
3	Header Pin	Copper Alloy	Sn Plated
2	Housing	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	CV	UNITS	mm	THIRD ANGLE PROJECTION	
CHK.	YangH	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
APP.	JASON	SCALE	2:1	DRAWING TYPE: SP-03	REV V0
DATE	23.11.03	SCALE	2:1	DRAWING TYPE: SP-03	REV V0

嘉溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

PART NO.:
WJIE500A-5.08-2*XP-1Y-00A