
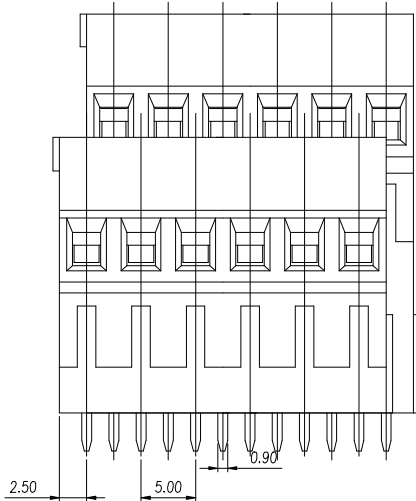
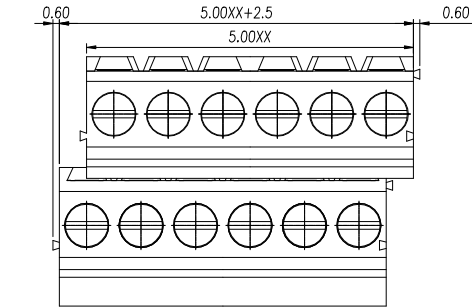
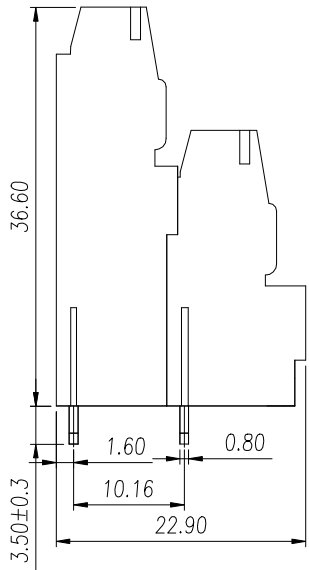


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权,否则禁止转让、复制、利用、交还本文件内容。侵犯者将负法律责任。 采用新法和外法专利的所有权利。

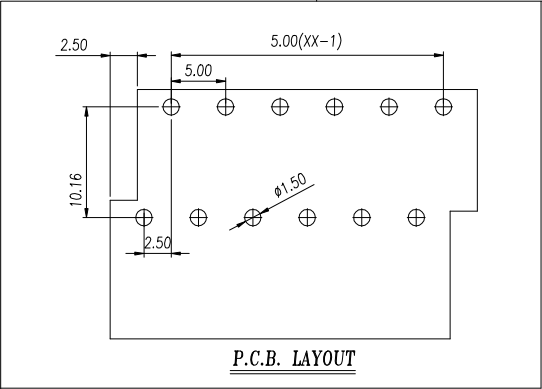

5

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		CY	24.11.12

UL/CUL 技术参数 UL/CUL Technical Data						
等 级 Use Group		B	C	D		
额定电压 Rated Voltage [V]		300	-	300		
额定电流 Rated Current [A]		15	-	10		
接线范围 Wire Range		30-14				
单/多芯线 Solid/Stranded [AWG]						
耐电压 Withstanding Voltage		1600V/1Min				
IEC 技术参数 IEC Technical Data						
过电压类别 Overvoltage Category		III	III	II		
污染等级 Contamination Class		3	2	2		
额定电压 Rated Voltage [V]		250	400	630		
额定电流 Rated Current [A]		24	24	24		
额定冲击电压 Impulse withstand voltagea [KV]		4.0	4.0	4.0		
导线截面积 Conductor cross section 硬质/柔性导线 Solid/ flexible [mm ²]		0.5-2.5				
一般参数 Other Data						
间距 Pitch /极数 Poles [mm] / [P]		5.0 / 2*02~2*24				
剥线长度 Stripping Length [mm]		6~7				
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4				
工作温度 Operating temperatur [°C]		-40~105				

General Tolerances								—	∕	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 100	
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

6	Screw	Steel	M2.5/Sn Plated
5	Cage	Copper Alloy	M2.5/Ni Plated
4	Header Pin	Copper Alloy	Sn Plated
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	CY	DATE	24.11.12	UNITS	mm	THIRD ANGLE PROJECTION		☉	
CHK.	YangHJ	DATE	24.11.12	SIZE	A4	TYPE: CUSTOMER DRAWING		SHEET 1 of 1	
APP.	JASON	DATE	24.11.12	SCALE	1.5:1	DRAWING TYPE: SP-03		REV	V0
WANJIE		慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD				PART NO.: WJE2K500B-5.0-2*XXP-1Y-00A			