
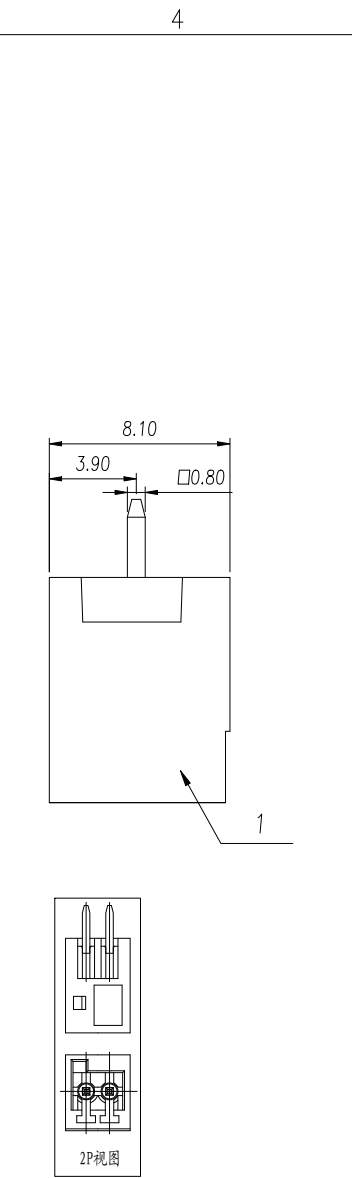
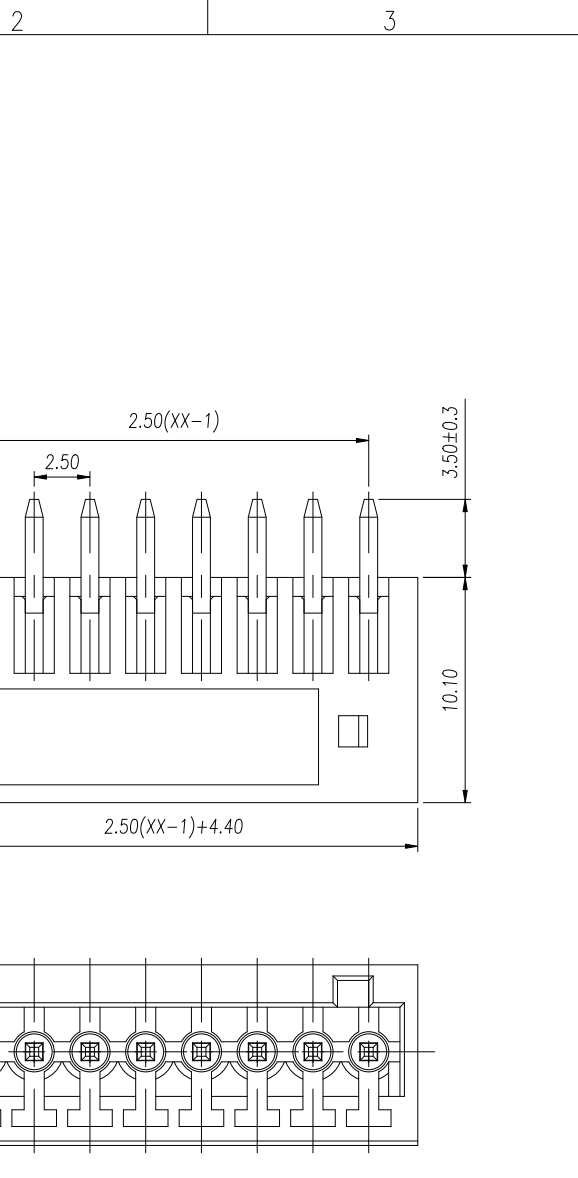


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权, 否则禁止转让、复制、利用、交流本文件的内容。侵犯者将承担赔偿责任。 保留新型和外观设计的所有权利。

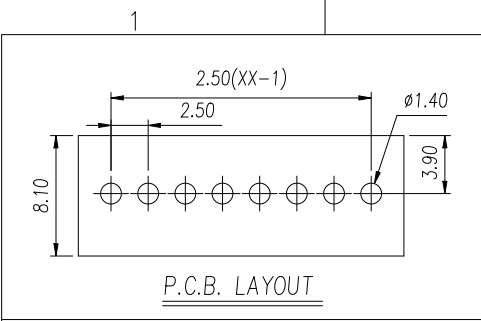

5		6			
REVISION RECORD					
REV.	ESCRPTION		ECN No.	APPROVED	DATE
0	新发行			YaoFei	23.11.27
UL/CUL 技术参数 UL/CUL Technical Data 等级 Use Group 额定电压 Rated Voltage [V] 额定电流 Rated Current [A] 接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG] 耐电压 Withstanding Voltage 1300V/1Min IEC 技术参数 IEC Technical Data IEC61984 过电压类别 Overvoltage Category III III II 污染等级 Contamination Class 3 2 2 额定电压 Rated Voltage [V] 80 160 320 额定电流 Rated Current [A] 6 6 6 额定冲击电压 Impulse withstand voltage [KV] 1.5 2.5 2.5 导线截面积 Conductor cross section 硬质/柔性导线 Solid/flexible [mm²] 一般参数 Other Data 间距 Pitch / 极数 Poles [mm] / [P] 2.5 / 02~24 工作温度 Operating temperature [°C] -40~105 焊锡温度 Soldering temperature 260°C/5S 引针尺寸 Pin Dimensions [mm] 0.8*0.8 PCB板孔径 PCB Hole Diameter [mm] Ø1.4 符合RoHS环保要求		cUL[®]us			