


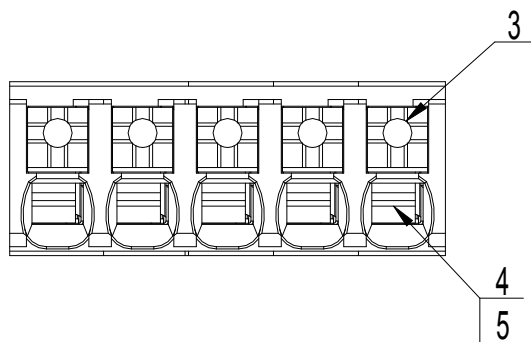

General Tolerances								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

5	Spring	Stainless Steel	
4	Clamp	Copper Alloy	Sn Plated
3	Button	PA66(G25)	UL94V-0
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

REVISION RECORD																			
REV.	ESCRIPTION					ECN No.		APPROVED	DATE										
V0	新发行							WangP	24.08.09										
										UL/CUL 技术参数									
										UL/CUL Technical Data									
										等 级		Use Group			B		C		D
										额定电压		Rated Voltage [V]			300		-		300
										额定电流		Rated Current [A]			10		-		10
										接线范围		Wire Range			28-16				
										单/多芯线		Solid/Stranded [AWG]							
										耐电压		Withstanding Voltage			1600V/1Min				
										IEC 技术参数					IEC61984				
										IEC Technical Data									
										过电压类别		Overvoltage Category			III		III		II
										污染等级		Contamination Class			3		2		2
										额定电压		Rated Voltage [V]			160		160		320
										额定电流		Rated Current [A]			10		10		10
										额定冲击电压		Impulse withstand voltage [KV]			2.5		2.5		2.5
										导线截面积		Conductor cross section			0.2-1.5				
										硬质/柔性导线		Solid/ flexible [mm²]							
										一般参数 Other Data									
间距		Pitch /极数		Poles [mm] / [P]		3.81 /02~24													
剥线长度		Stripping Length [mm]			9~10														
工作温度		Operating temperature [°C]			-40~105														
符合RoHS环保要求																			

S.	WangP	DATE	24.08.09	UNITS	mm	THIRD ANGLE PROJECTION		
K.	YangHJ	DATE	24.08.09	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1	
P.	JASON	DATE	24.08.09	SCALE	3:1	DRAWING TYPE: SP-03	REV	V0



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO.,LTD

PART NO.:
WJ15KV-3.81-XXP-1Y-00A