
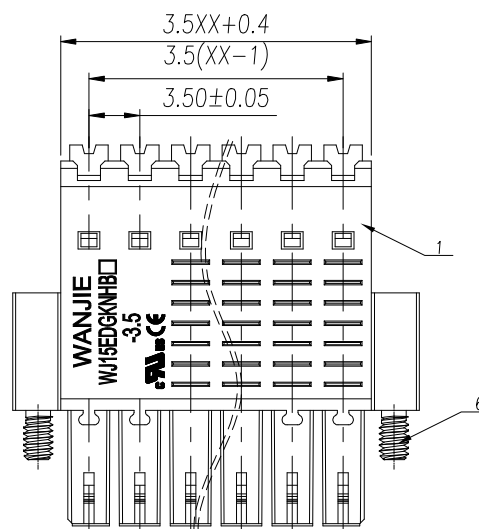
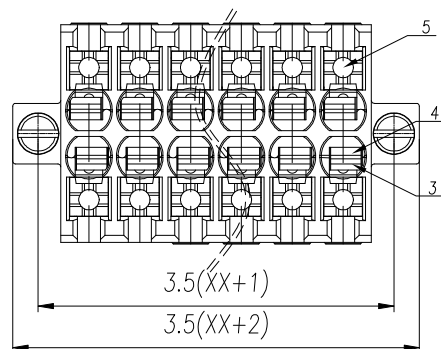


General Tolerances								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

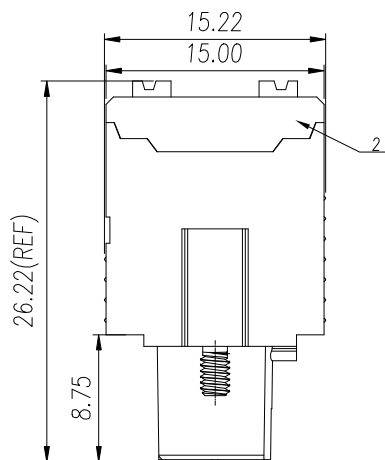

6	Screw	Steel	M2/Zn Plated
5	Button	PA66(G25)	UL94V-0
4	Clamp	Copper Alloy	Sn Plated
3	Spring	Stainless steel	
2	Cover	PA66(G25)	UL94V-0
1	Housing	PA66(G25)	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		YuCZ	23.10.24

UL/CUL	技术 参数			
UL/CUL	Technical Data			
等 级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	50	300
额定电流	Rated Current [A]	9.5	9.5	9.5
接线范围	Wire Range	26-16		
单/多芯线	Solid/Stranded [AWG]			
耐电压	Withstanding Voltage	1600V/1Min		
IEC 技术参数		IEC61984		
IEC Technical Data				
过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	13.4	13.4	13.4
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积	Conductor cross section	0.2-1.5		
硬质/柔性导线	Solid/ flexible [mm²]			
一般参数 Other Data				
间距 Pitch / 极数 Poles	[mm] / [P]	3.5 / 2*02-2*24		
剥线长度 Stripping Length	[mm]	10~11		
工作温度 Operating temperature	[°C]	-40~105		
符合RoHS环保要求				

DES.	YuCZ	DATE	23.10.24	UNITS	mm	THIRD ANGLE PROJECTION			
CHK.	YangHJ	DATE	23.10.24	SIZE	A4	TYPE: CUSTOMER DRAWING		SHEET 1 of 1	
APP.	JASON	DATE	23.10.24	SCALE	2.5:1	DRAWING TYPE: SP-03		REV	V0
 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ15EDGKNHBM-3.5-2*XXP-1Y-00A			