


REVISION RECORD			
REV.	DESCRIPTION	ECN No.	APPROVED DATE
V0	新发行	V0C2	23.10.25

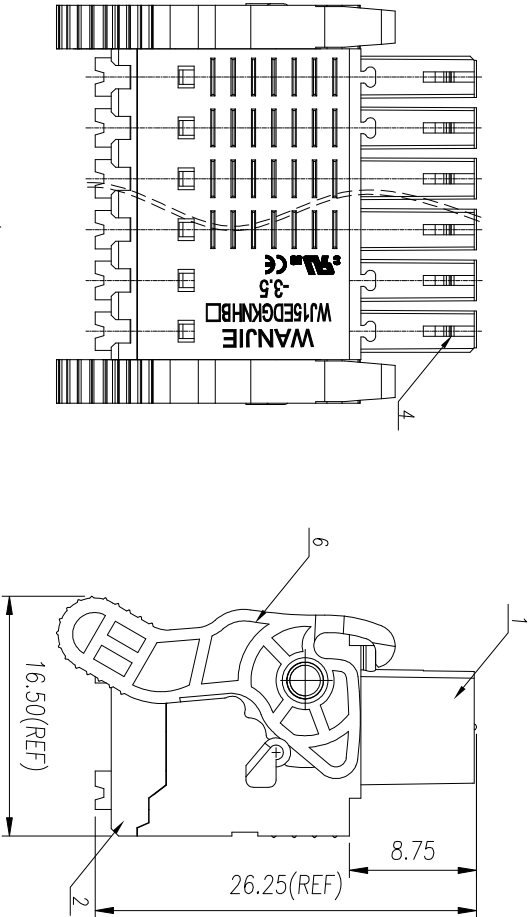

UL/CUL 技术参数				
UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage	[V]	300	50 300
额定电流	Rated Current	[A]	9.5	9.5 9.5
接线范围	Wire Range		26-16	
单 / 多芯线	Solid/Stranded	[AWG]		
耐电压	Withstanding Voltage		1600V/1Min	
IEC 技术参数				
IEC Technical Data				
过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage	[V]	160	160 320
额定电流	Rated Current	[A]	13.4	13.4
额定冲击电压	Impulse withstand voltage	[kV]	2.5	2.5
导线截面积	Conductor cross section		0.2-1.5	
硬质 / 柔性导线	Solid / flexible	[mm²]		

一般参数			
Other Data			
间距	Pitch	极数	Poles
剥线长度	Stripping Length	[mm]	3.5/2*02-2*24
工作温度	Operating temperature	[°C]	10~11
符合RoHS环保要求			
符合RoHS环保要求	Operating temperature	[°C]	-40~105

ITEM	NAME OF PART	MATERIAL	NOTES
6	Hook	POM	UL94-HB
5	Button	PA66(G25)	UL94V-0
4	Clamp	Copper Alloy	Sn Plated
3	Spring	Stainless steel	
2	Cover	PA66(G25)	UL94V-0
1	Housing	PA66(G25)	UL94V-0

General Tolerances									
variable range	to	over	to	over	to	over	to	over	to
6	to	6	to	10	to	30	to	60	to
10	to	10	to	30	to	60	to	100	to
30	to	30	to	60	to	100	to	160	to
60	to	60	to	100	to	160	to	160	to
100	to	100	to	160	to	160	to	160	to
160	to	160	to	160	to	160	to	160	to
160	to	160	to	160	to	160	to	160	to
160	to	160	to	160	to	160	to	160	to

DES.	V0C2	DATE	23.10.25	UNITS	mm	THIRD ANGLE PROJECTION	REV	V0
CHK.	YangHJ	DATE	23.10.25	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET	1 of 1
APP.	JASON	DATE	23.10.25	SCALE	2:1	DRAWING TYPE: SP-03	REV	V0
WANJIIE				嘉溪市万捷电子有限公司		PART NO.: WJ15EDGKNHB-3.5-2*XP-1Y-00A		
WANJIIE				CXM WANJIE ELECTRONIC CO., LTD				