
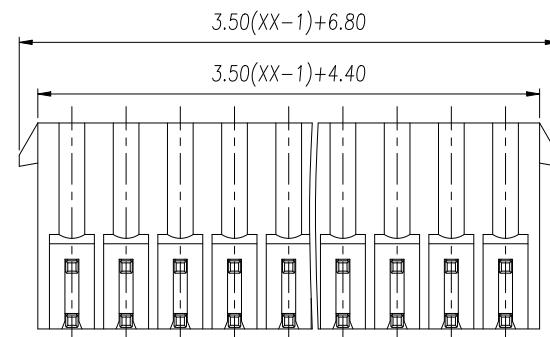


General Tolerances										<input type="checkbox"/>		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 200	to 10	over 10 to 100	over 100 to 200		
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60		

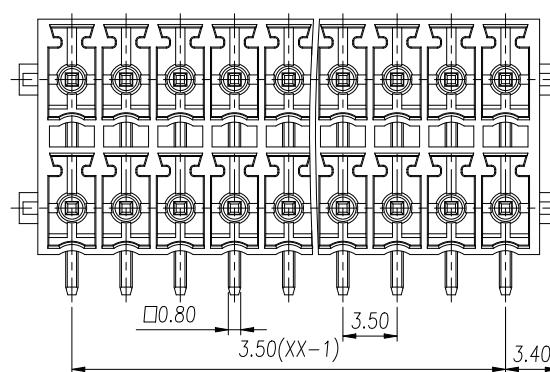

REVISION RECORD						
REV.	DESCRIPTION		ECN No.	APPROVED	DATE	
0	新发行			YaoFei	23.11.30	
	UL/CUL 技术参数	UL/CUL Technical Data				
	等级 Use Group		B	C	D	
	额定电压 Rated Voltage [V]	300	-	-		
	额定电流 Rated Current [A]	8	-	-		
	接线范围 Wire Range					
	单/多芯线 Solid/Stranded [AWG]					/
	耐电压 Withstanding Voltage					1600V/1Min
	IEC 技术参数	IEC Technical Data	IEC61984			
	过电压类别 Overvoltage Category		III	III	II	
	污染等级 Contamination Class	3	2	2		
	额定电压 Rated Voltage [V]	160	160	250		
	额定电流 Rated Current [A]			8		
	额定冲击电压 Impulse withstand voltage [KV]					2.5
	导线截面积 Conductor cross section					
	硬质/柔性导线 Solid/flexible [mm²]					/
	一般参数 Other Data					
	间距 Pitch /极数 Poles [mm] / [P]		3.5 / 02*02~02*24			
	工作温度 Operating temperature [°C]		-40~+130			
	焊锡温度 Soldering temperature					285°C/10S
	引针尺寸 Pin Dimensions [mm]					0.8*0.8
	PCB板孔径 PCB Hole Diameter [mm]					Ø1.4
	符合RoHS环保要求					

DES.	YaoFei	DATE	23.11.30	UNITS	mm	THIRD ANGLE PROJECTION	
CHK.	YangHJ	DATE	23.11.30	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
APP.	JASON	DATE	23.11.30	SCALE	1:1	DRAWING TYPE: SP-03	REV 0
 慈溪市万捷电子有限公司 WANJIE CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ15EDGRHBN-THT-3.5-2*XXP-1Y-00A	

ITEM	NAME OF PART	MATERIAL	NOTES
3	Long Pin	Copper Alloy	Sn Plated
2	Short Pin	Copper Alloy	Sn Plated
1	Housing	LCP	UL94V-0