
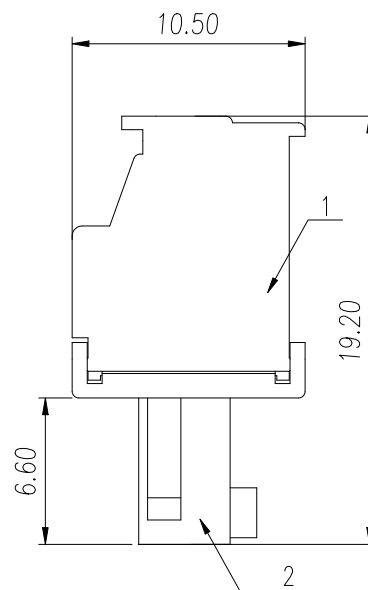
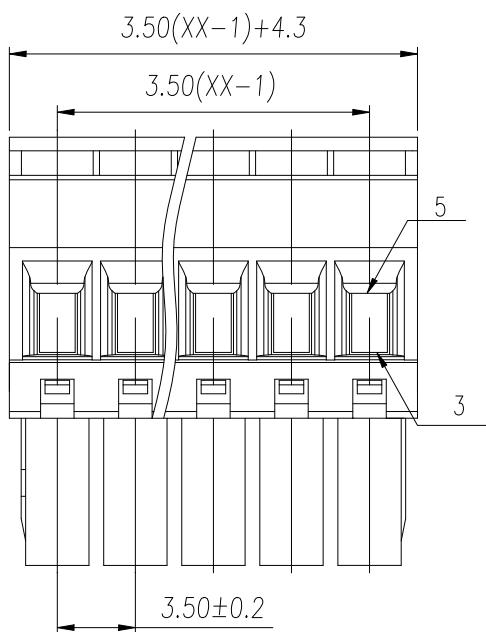


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权, 否则禁止转让、复制、利用、交流本文件的内容。侵权者将负赔偿责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。

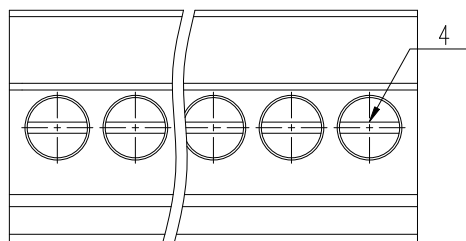

General Tolerances								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

5	Clamp	Copper Alloy	Sn Plated
4	Screw	Steel	M2/Zn Plated
3	Cage	Copper Alloy	M2/Ni Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

REVISION RECORD									
REV.	ESCRIPTION					ECN No.	APPROVED	DATE	
0	新发行						YaoFei	23.10.24	
UL/CUL 技术参数 UL/CUL Technical Data									
等 级		Use Group				B	C	D	
额定电压		Rated Voltage [V]				300	-	300	
额定电流		Rated Current [A]				8	-	8	
接线范围		Wire Range				28-16			
单/多芯线		Solid/Stranded [AWG]							
耐电压		Withstanding Voltage				1600V/1Min			
IEC 技术参数 IEC Technical Data									
过电压类别		Overvoltage Category				III	III	II	
污染等级		Contamination Class				3	2	2	
额定电压		Rated Voltage [V]				160	160	320	
额定电流		Rated Current [A]				8	8	8	
额定冲击电压		Impulse withstand voltage [KV]				2.5	2.5	2.5	
导线截面积						Conductor cross section			
硬质/柔性导线		Solid/ flexible [mm²]				0.2-1.5			
一般参数 Other Data									
间距 Pitch /极数 Poles		[mm] / [P]				3.5 / 02~24			
剥线长度 Stripping Length		[mm]				6~7			
螺丝 Screw/扭矩 Torque(Max)		[N.m]				M2/0.2			
工作温度 Operating temperature		[°C]				-40~105			
符合RoHS环保要求									

S.	YaoFei	DATE	23.10.24	UNITS	mm	THIRD ANGLE PROJECTION		
K.	YangHJ	DATE	23.10.24	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1	
P.	JASON	DATE	23.10.24	SCALE	3:1	DRAWING TYPE: SP-03	REV	0



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

PART NO.:
WJ15EDGKB-3.5-XXP-1Y-00A