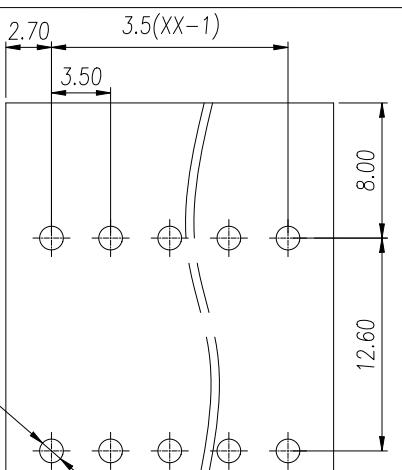
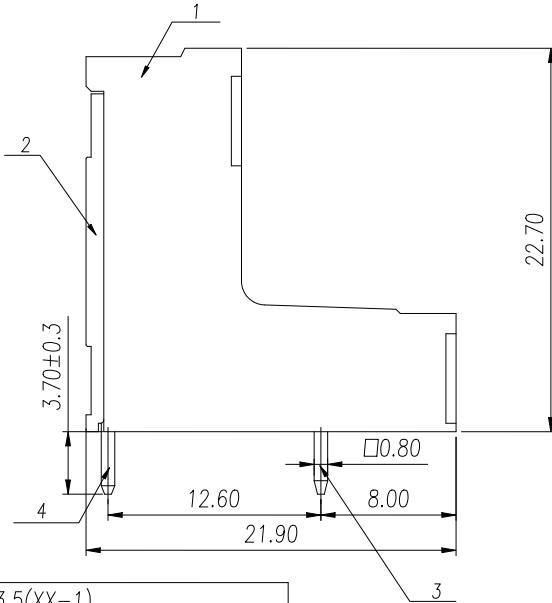
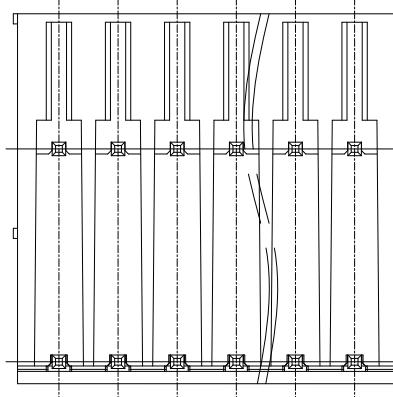
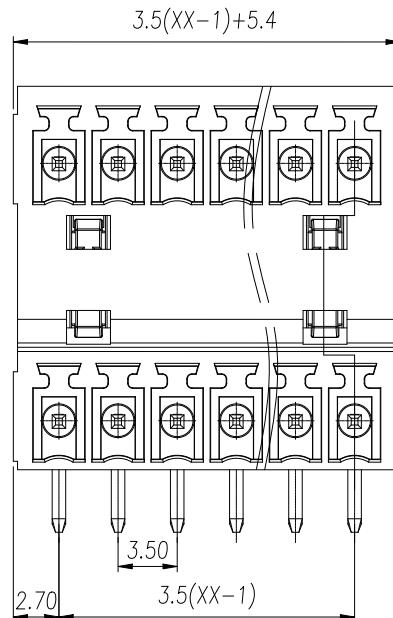


## REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE
0	新发行		YaoFei	23.11.28

P.C.B. LAYOUT

General Tolerances										— □ ⊥		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to		
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60		

UL/CUL 技术参数  
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围	Wire Range			
单/多芯线	Solid/Stranded [AWG]			
耐电压	Withstanding Voltage	1600V/1Min		

IEC 技术参数  
IEC Technical Data

IEC61984

过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	250
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积	Conductor cross section			
硬质/柔性导线	Solid/ flexible [mm <sup>2</sup> ]			
一般参数	Other Data			
间距	Pitch /极数 Poles [mm] / [P]	3.5 / 2*2~2*24		
工作温度	Operating temperature [°C]	-40~105		
焊锡温度	Soldering temperature	260°C/5S		
引针尺寸	Pin Dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	Ø1.4		

## 符合RoHS环保要求

DES.	YaoFei	DATE	23.11.28	UNITS	mm	THIRD ANGLE PROJECTION	⊕
CHK.	YangHJ	DATE	23.11.28	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
APP.	JASON	DATE	23.11.28	SCALE	2:1	DRAWING TYPE: SP-03	REV 0
 慈溪市万捷电子有限公司 WANJIE CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ15EDGRT-3.5-2*XXP-1Y-00A	