
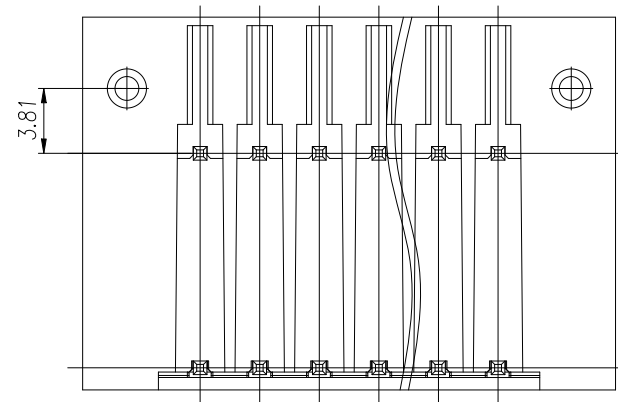
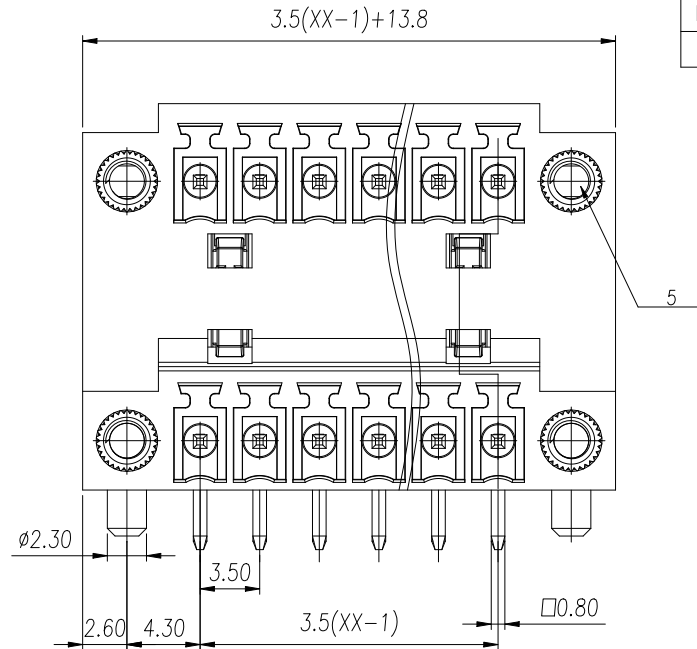


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除经许可于网络转载、复制、利用、交流本文档内容外，其他任何形式之复制、传播、使用、仿造等行为均须事先取得本公司之书面授权，否则将依法追究法律责任。

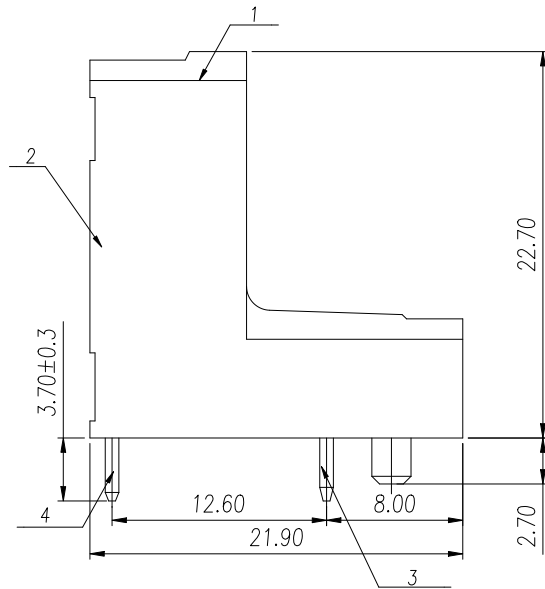

P.C.B. LAYOUT

General Tolerances

								—	∕	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE
0	新发行		ChenK	25.03.28

UL/CUL 技术参数		UL/CUL Technical Data			UL/CUL Technical Data		
等级	Use Group	B	C	D	额定电压	Rated Voltage [V]	300
额定电压	Rated Voltage [V]	300	-	300	额定电流	Rated Current [A]	8
额定电流	Rated Current [A]	8	-	8	接线范围	Wire Range	-
接线范围	Wire Range	-	-	-	单/多芯线	Solid/Stranded [AWG]	-
单/多芯线	Solid/Stranded [AWG]	-	-	-	耐电压	Withstanding Voltage	1600V/1Min
耐电压	Withstanding Voltage	1600V/1Min	-	-	IEC 技术参数	IEC Technical Data	-
IEC 技术参数	IEC Technical Data	-	-	-	过电压类别	Overvoltage Category	III
过电压类别	Overvoltage Category	III	III	II	污染等级	Contamination Class	3
污染等级	Contamination Class	3	2	2	额定电压	Rated Voltage [V]	160
额定电压	Rated Voltage [V]	160	160	250	额定电流	Rated Current [A]	7
额定电流	Rated Current [A]	7	7	7	额定冲击电压	Impulse withstand voltagea [KV]	2.5
额定冲击电压	Impulse withstand voltagea [KV]	2.5	2.5	2.5	导线截面积	Conductor cross section	-
导线截面积	Conductor cross section	-	-	-	硬质/柔性导线	Solid/flexible [mm²]	-
硬质/柔性导线	Solid/flexible [mm²]	-	-	-	一般参数	Other Data	-
一般参数	Other Data	-	-	-	间距	Pitch / 极数 Poles [mm] / [P]	3.5 / 2*2-2*24
间距	Pitch / 极数 Poles [mm] / [P]	3.5 / 2*2-2*24	-	-	工作温度	Operating temperature [°C]	-40~105
工作温度	Operating temperature [°C]	-40~105	-	-	焊锡温度	Soldering temperature	260°C/5S
焊锡温度	Soldering temperature	260°C/5S	-	-	引针尺寸	Pin Dimensions [mm]	0.8*0.8
引针尺寸	Pin Dimensions [mm]	0.8*0.8	-	-	PCB板孔径	PCB Hole Diameter [mm]	Ø1.4
PCB板孔径	PCB Hole Diameter [mm]	Ø1.4	-	-	符合RoHS环保要求		

5	Nut	Copper Alloy	M2.5
4	Long Pin	Copper Alloy	Sn Plated
3	Short Pin	Copper Alloy	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	ChenK	DATE	25.03.28	UNITS	mm	THIRD ANGLE PROJECTION	⊕
CHK.	YangHJ	DATE	25.03.28	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
APP.	JASON	DATE	25.03.28	SCALE	2:1	DRAWING TYPE: SP-03	REV 0
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ15EDGRTM-3.5-2*XXP-1Y-00A	