






慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

| REV. | DESCRIPTION | ECN No. | APPROVED | DATE |
|------|-------------|---------|----------|------|
| | | | | |
| | | | | |
| | | | | |
| | | | | |

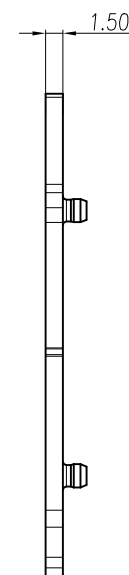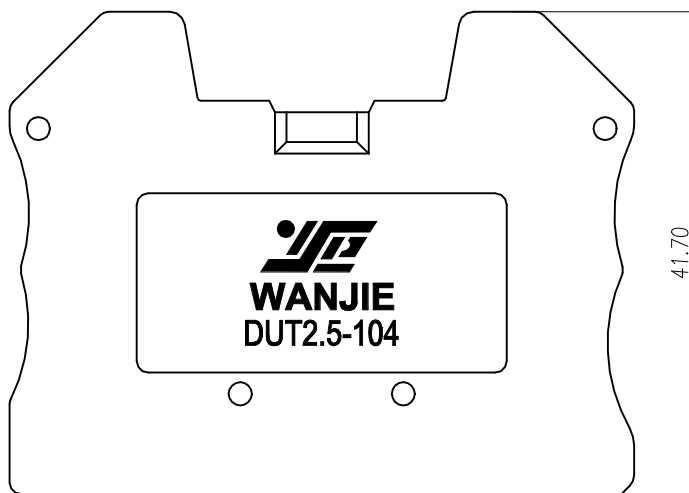

| | | |
|------|----------------------|--------------|
| 材料 | Material | |
| 绝缘材料 | Insulation Material | PA66 |
| 阻燃等级 | Inflammability | UL94V-0 |
| 一般参数 | Other Data | |
| 工作温度 | Operating temperatur | [°C] -40-105 |

| | |
|------------------|-------------------|
| 黄绿色/Green-Yellow | DUT2.5-104-PE-00A |
| 白色/White | DUT2.5-104-WH-00A |
| 红色/Red | DUT2.5-104-RD-00A |
| 黑色/Black | DUT2.5-104-BK-00A |
| 黄色/Yellow | DUT2.5-104-YE-00A |
| 绿色/Green | DUT2.5-104-GN-00A |
| 橙色/Orange | DUT2.5-104-OG-00A |
| 蓝色/Blue | DUT2.5-104-BU-00A |
| 灰色/Gray | DUT2.5-104-GY-00A |
| 颜色/Color | 订货号 /Order NO. |

| linear dimension(Tolerances Standard GB/T 14486-2008) | | | | | | | | | | |
|---|-------|--------------|---------------|---------------|----------------|-----------------|-------|----------------|-------------|------|
| variable range | to 6 | over 6 to 10 | over 10 to 30 | over 30 to 60 | over 60 to 100 | over 100 to 160 | to 10 | over 10 to 100 | over 100 to | |
| tolerance | ±0.20 | ±0.30 | ±0.50 | ±0.70 | ±1.00 | ±1.30 | ±1.60 | 0.10 | 0.30 | 0.60 |

| | | | | | | | | |
|------------|----|-----------|----|------------|-----|-------------------------------|-------------------|----|
| 单位 / UNITS | mm | 尺寸 / SIZE | A4 | 比例 / SCALE | 1:1 | 第三视角 / THIRD ANGLE PROJECTION | 版本 / REV | V0 |
| | | | | | | 名称 / TITLE | DUT2.5-104-XX-00A | |



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD