


GUV6-104

GUV Push-in terminal block

Download date : 2024-05-16

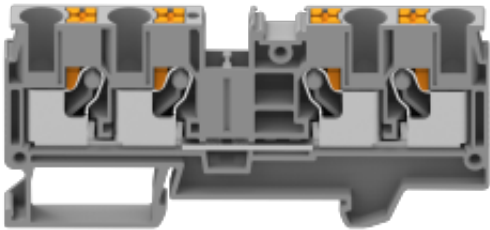

Electrical Diagram :



For reference only!version1.0

CUL Technical Data (UL1059 )

|                      |            |     |     |
|----------------------|------------|-----|-----|
| Use Group            | B          | C   | D   |
| Rated Voltage [V]    | 600        | 600 | 600 |
| Rated Current [A]    | 40         | 40  | 5   |
| Withstanding Voltage | 2200V/1Min |     |     |
| Wire Range           | 20-8AWG    |     |     |

IEC Technical Data (IEC 60947-7-1)

|                           |       |
|---------------------------|-------|
| Overvoltage Category      | III   |
| Contamination Class       | 3     |
| Rated Voltage [V]         | 1000V |
| Rated Current [A]         | 41A   |
| Impulse withstand voltage | 8KV   |

Conductor cross section

|                       |           |
|-----------------------|-----------|
| Soild                 | 0.5-10mm² |
| Flexible              | 0.5-6mm²  |
| Flexible with ferrule | 0.5-6mm²  |

GUV6-104

GUV Push-in terminal block

Download date : 2024-05-16




Material

|                              |              |
|------------------------------|--------------|
| Insulation Material          | PA66         |
| Flame relardant rating       | UL94V-0      |
| Conductor Material           | Copper alloy |
| Plating of conductor surface | Sn plated    |

Other Data

|                              |               |
|------------------------------|---------------|
| Length/Height/Thickness [mm] | 90.6/42.3/8.2 |
| Connection Points            | 4             |
| Stripping Length [mm]        | 10-12         |
| Type of rail                 | DIN 35        |
| Screw/Torque(Max)[N.m]       | /             |
| Operating temperature [°C]   | -40~+105      |


Dimensions

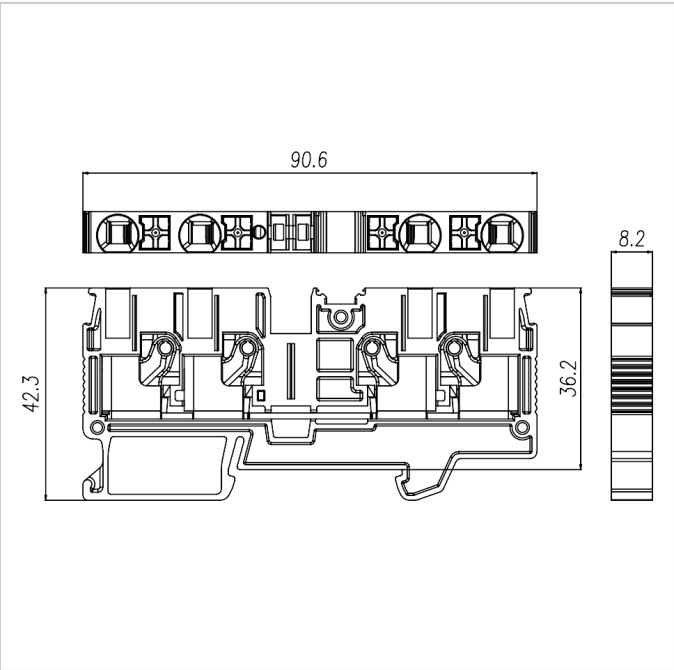



Accessories



[FUVA6-XX](#)



[MUV6-10](#)



[PUV6-56](#)



[EB-35](#)



[EW-35](#)



[DGL2-35x7.5A](#)



[DGL2-35x7.5B](#)



[DGL2-35x7.5C](#)



[DGL2-35x7.5D](#)



[DUV6-104](#)



[DGS1-35x7.5W4.2x12](#)

[DGS1-35x7.5W5.2x15](#)

[DGS1-35x7.5W](#)